

OFFICE OF THE PANCHAYAT SAMITI, PATRAPUR



Letter No. 3048

date..12.9.2025

To
The Deputy Director, Advertisement,
Information and Public Relation Deptt.Govt.of Odisha.

Sub:- Request to publish the Tender Notice No. 02/2025-26 of BDO, Patrapur in two daily Odiya local news paper i.e on Samaja & Pramaya once only.

Sir,

With reference to this letter on the subject cited above, I am to submit herewith the tender call notice bearing No. 02/2025-26 and request to publish the same in tow daily Odiya local news paper i.e. on Samaja & Pramaya in a minimum possible space once only with in two days and submit the bill along with complimentary copy of the newspaper containing the Tender Call Notice to this Office for reference and record.

OFFICE OF THE PANCHAYAT SAMITI, PATRAPUR



e-mail:- ori-patrapur@nic.in

DETAIL TENDER CALL NOTICE No. 02/2025-26

The Block Development Officer, Patrapur invites sealed percentage rate tenders in single cover system on behalf of Governor of Odisha from registered and eligible class of civil contractor of the state P W D (R&B)/Water Resources/Rural Works/M.I/C.P.W.D for the following work eventually to be drawn up in the P.W.D. F-2 forms in conformity with the Detailed Tender Call Notice.

Sl No.	Name of Work	Value of work(In Rs)	Bid security@ 1%(In Rs)	Cost of Bid document (In Rs)	Class of Bidder	Period of completion
1	Construction of Addl. Class room at Baligaon, P.S under Tumba G.P	1318006/-	13181/-	6000/-	'D' & 'C' Class	6 (Six) Calendar month
2	Construction of Addl. Class room at Thanagaon P.S under Tumbagada G.P	1318006/-	13181/-	6000/-	'D' & 'C' Class	6 (Six) Calendar month
3	Construction of Addl. Class room at Jarada P.S Under Jaradagada G.P	1318006/-	13181/-	6000/-	'D' & 'C' Class	6 (Six) Calendar month
4	Construction of Addl. Class room at Bishnu Priya Bidyapitha at Kelua under Padadigi G.P	1435979/-	14360/-	6000/-	'D' & 'C' Class	6 (Six) Calendar month
5	Construction of Addl. Class room at Mahadeipur UPS under Ambapur G.P	1318006/-	13181/-	6000/-	'D' & 'C' Class	6 (Six) Calendar month
6	Construction of GPLF Office building with Market Complex at Jarada	2407272/-	24073/-	6000/-	'C' & 'B' Class	6 (Six) Calendar month

1. Date of sale of tender papers : 15.09.2025
2. Last date of receipt of Tender papers : 04.10.2025
3. Date of opening of Tender papers : 06.10.2025
4. For more details and terms & conditions, please visit www.ganjam.nic.in

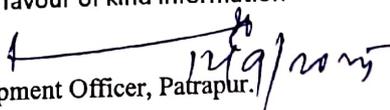
Yours faithfully,


Block Development Officer, Patrapur

Memo No. 3049

dated.....12.9.2025

Copy submitted to the District Information and Public Relation Officer, Ganjam, Chatrapur for favour of kind information and necessary action.


Block Development Officer, Patrapur.





OFFICE OF THE PANCHAYAT SAMITI, PATRAPUR

No: 3052

Date: 12.9.2025

DETAIL TENDER CALL NOTICE No. 02/2025-26

The Block Development Officer, Patrapur on behalf of Governor of Odisha invites sealed tender in confirming with sealed tender call notice in single cover system from registered and eligible class of civil contractor of the state PWD or equivalent class of (R&B)/Water Resources/Rural Works/M.I/C.P.W.D/Central Govt./State Govt. undertaking for the following work eventually to be drawn up in the percent rate contractor form (P-I).

Sl no.	Name of the Work	Value of work(InRs)	EMD In Rs.	Cost of Tender paper (Non-Refundable)	Class of Bidder	Period of completion
1	Construction of Addl. Class room at Baligaon, P.S under Tumba G.P	1318006/-	13181/-	6000/-	'D' & 'C' Class	6 (Six) Calendar month
2	Construction of Addl. Class room at Thanagaon P.S under Tumbagada G.P	1318006/-	13181/-	6000/-	'D' & 'C' Class	6 (Six) Calendar month
3	Construction of Addl. Class room at Jarada P.S Under Jaradagada G.P	1318006/-	13181/-	6000/-	'D' & 'C' Class	6 (Six) Calendar month
4	Construction of Addl. Class room at Bishnu Priya Bidyapitha at Kelua under Padadigi G.P	1435979/-	14360/-	6000/-	'D' & 'C' Class	6 (Six) Calendar month
5	Construction of Addl. Class room at Mahadeipur UPS under Ambapur G.P	1318006/-	13181/-	6000/-	'D' & 'C' Class	6 (Six) Calendar month
6	Construction of GPLF Office building with Market Complex at Jarada	2407272/-	24073/-	6000/-	'C' & 'B' Class	6 (Six) Calendar month

Terms and Conditions:

- 1. Cost of Tender paper :** The Tender paper & specifications can be obtained from the official website of Ganjam i.e. www.ganjam.nic.in from 15.09.2025.
- 2. Date of receipt and mode of submission of Tender papers :** The Tenderers have to submit the sealed tender papers in complete shape through Registered Post/Speed post only, in the addressed to the B.D.O, Patrapur. The last date of receipt of tender papers is **04.10.2025 up to 5.00 P.M.** The undersigned will not be responsible for postal delay if any or non receipt of the papers in time. **The tenders must super scribe the name of the work/project on the sealed envelope.**



3. **Date of Opening of Tender Paper:** The tender paper shall be opened on **06.10.2025** at **04.00 P.M** in the presence of the tenderers or their authorized representative having written authorization for the purpose and the members of tender committee.

4. **Earnest Money Deposit :** 1%(one percent) of the bid value in shape of post office Term Deposit / Short Term Deposit/N.S.C/K.V.P/Deposit Receipt of any Nationalized bank duly pledged in favour of **Block Development Officer, Patrapur**. The Tender papers without required amount of E.M.D. will not be considered and transfer or adjustment of E.M.D is also inadmissible.

5. **Documents to be attached:** The following documents should be furnished with the tender papers failing which the tender will be liable to rejection.

(a) E.M.D. pledged in favour of the Block Development Officer, Patrapur.

(b) Cost of tender paper in shape of B.D in favour of the B.D.O., Patrapur

(c) Attested copy of Contractor Registration Certificate.

(d) Attested copy of PAN card and Certificate of GSTIN.

(e) Attested copy of caste certificate issued by competent authorities in case of SC/ST contractors desirous of availing preference.

(f) The bidders have to produce an original affidavit in support of the authenticity of documents etc attached with the tender papers.

(g) Affidavit as regards the facts of availing award of work without submission of EMD/ISD during the current financial year in case of Engineer Contractors desirous of availing exemption of EMD otherwise their tender paper will be liable for rejection.

(h) Joint venture consortium agreements are not allowed to participate in tender.

6. Shortfall of any required document(s) and EMD, the tender paper will be liable for rejection.

7. **Additional Performance Security Deposit :** The affidavit in lieu of APS will be submitted by the successful bidder for the cost of less quoted in percentage of the amount put to tender before the signing of the agreement of the contract.(Vide Works Department Letter No.-13286 Date-07/09/2017, Govt. of Odisha, Works Department.)

8. **Forfeiture:** The EMD amount will be forfeited, if the tenderer backs out from the offer acceptance of tender, by the competent authority.

9. Submission of more than one tender paper by a bidder for a single work will be liable for rejection of all such tender papers.

10. The Block Development Officer, Patrapur reserves the right to reject any or all the tenders without assigning any reasons thereof. Other details can be seen in the bidding documents.


Block Development Officer
Patrapur.

Memo No. 3053

Date: 12.9.2025

Copy submitted to the Director, Information and Public Relations Department Govt. Of Odisha, Bhubaneswar for kind information and requested to publish the above tender call notice in two daily Odia news paper for wide publicity in minimum space on or before 15.09.2025.


Block Development Officer
Patrapur

Memo No 3054

Date: 12.9.2025

Copy submitted to the Collector, Ganjam /CDO-Cum-Executive Officer, Zilla Parishad, Ganjam/ DPC,SSA Ganjam / DI & PRO, Ganjam for favour of kind information and necessary action.


Block Development Officer
Patrapur

Memo No 3055

Date: 12.9.2025

Copy to the Tahasildar Patrapur / Executive Engineer, Zill Parishad, Ganjam / S.E. RWS & S, Berhampur /S.E., R & B Division, Berhampur / S.E., M.I. Division, Berhampur / S.E., R.W. Division, Berhampur / All BDOs of Ganjam District for information and necessary action with request to display in their Notice board for wide publicity.


Block Development Officer
Patrapur

Memo No 3056

Date: 12.9.2025

Copy to N.I.C., Ganjam for uploading the detail tender call notice and the bid documents in the official website of Ganjam i.e. www.ganjam.nic.in.


Block Development Officer
Patrapur

Memo No 3057

Date: 12.9.2025

Copy to Office Notice Board and tender file of Patrapur Block for uploading the DTCN and bid documents at NIC, Ganjam.


Block Development Officer
Patrapur

Issued to Sri.....Contractor.....
Class.....

SCHEDULE OF QUANTITY & ABSTRACT OF COST

Name of the Work: - CONSTRUCTION OF GPLF BUILDING AT JARADA OF JARADA G.P
UNDER PATRAPUR BLOCK

Estimated Cost: - Rs. 24,07,272.00

EMD: - Rs. 24,073.00

Sl No	Description of Item	Qty	Unit	Rate	Amount
	Civil Work				
1	Earth Work in excavation of foundation in hard soil within initial leads of 50m & lifts of 1.5m including dressing and levelling of bed etc. and adding contractor's profit and over head charges, etc. complete in all respect.	58.50	Cum	270.90	15,848.00
2	Supplying & filling of foundation with course sand well watered and rammed including cost, cost of all labour, carriage, royalty complete in all respect.	57.63	Cum	1330.17	76,658.00
3	Cement Concrete (1:3:6) using 40mm size hard granite C.B. metal approved quality from approved quarry including cost, carriage, royalty, cost of all labour. etc complete and as directed by E.I.C.	19.00	Cum	6229.51	118361.00
4	CC(1:2:4) using 12mm size chips	0.60	Cum	8067.27	4840.00
5	R.C.C. M-20 grade with 20mm and down grade C.B. chips of approved quality from approved quarry including hoisting, laying hire charges of concrete mixture, vibrator, watering, curing and cost of all materials and labour, centering shuttering etc complete but excluding cost of reinforcement.	50.60	cum	6624.39	335194.00
6	Rigid smooth centering & shuttering				
A	Foundation & plinth	48.00	Sqm	247.51	11880.00
B	R.C.C Beam & Column	183.78	sqm	1189.28	218566.00
C	Lintel	34.06	sqm	570.30	19424.00
D	Slab,landing,balconies, sun shades & Chajja	131.13	Sqm	755.72	99098.00
E	Stair	6.20	sqm	1043.30	6468.00
7	Straightening, cutting, bending bent up or coiled rods, including cranking, hooking, welding or jointing the M.S. rods or tor confirming to I.S. 432 (Plain) and 1785 (Tor) steel and binding, tying the grills, hoisting,	57.282	qntl	8674.68	496901.00

CONTRACTOR

Block Development Officer, PATRAPUR

CONSTRUCTION OF GPLF BUILDING AT JARADA UNDER PATRAPUR BLOCK



	lowering and placing in proper position required for R.C.C. works including cost, conveyance and taxes of M.S. rods or tor steel and binding wires of 18 to 20 gauge and cost of all labour etc. complete in all respect.				
8	Brick Machinery work in Fly-ash Bricks of 23cm.x 11cm.x 8cm. size having crushing strength not less than 75 Kg/Cm ² in cement mortar (1:6) in superstructure including splays, cuttings, circular moldings, watering & curing for 7 days, cost, conveyance, taxes & royalties of all materials, labour with T&P etc. complete in all respect.				-
A)	Foundation and plinth	17.10	Cum	5611.18	95951.00
9	Super structure	41.25	Cum	5644.18	232822.00
10	6 mm thick C.P.(1:4) finished smooth surface to RCC surface including watering, curing, cost, carriage, royalty of all materials, cost of all labour, etc complete as per the direction of E.I.C.	131.22	Sqm	216.31	28384.00
11	12mm thick C.P.(1:6) on brick masonry to the smooth surface including watering, curing, cost, carriage, royalty of all materials, cost of all labour, etc complete as per the direction of E.I.C.	157.69	Sqm	199.04	31387.00
12	16mm thick C.P. (1:6) over brick masonry to the smooth surface including watering, curing cost, carriage, royalty, and taxes of all materials, cost of all labour, etc complete as per the direction of E.I.C.	398.82	Sqm	284.15	113325.00
13	Supplying ,fitting &fixing of vitrified industrial tiles in floor	10.84	Sqm	1044.28	11320.00
14	Fixing the glazed tiles on walls over 12mm thick c.p (1:3)	30.67	Sqm	903.24	27702.00
15	Supplying, fitting & fixing of 10 mm thick & size of 600x600 mm Glazed Vitrified floor tiles (GVT) of matt finish(WOODEN FINISH/RUSTIC FINISH) with veilcraft (VC) shield(Scratch free/stain free) with water absorption limit between 0.08% to 3% and conforming to IS : 15622:2006 (Group B Ib) laid on 20 mm thick cement mortar (1:4) and filling joints with white cement of approved quality including cost of all materials, etc. required for the work all complete as per direction of E.I.C.				
	Ground Floor	96.72	Sqm	1187.74	114878.00
16	Fixing of 10 mm thick & size of 600x600 mm Glazed Vitrified wall tiles (GVT) of matt finish(WOODEN FINISH/RUSTIC FINISH) with veilcraft (VC) shield(Scratch free/stain free) with				-

CONTRACTOR

Block Development Officer, PATRAPUR

CONSTRUCTION OF GPLF BUILDING AT JAIRADA UNDER PATRAPUR BLOCK



	water absorption limit between 0.08% to 3% and conforming to IS : 15622:2006 (Group B Ib) in dados skirting and risers of steps on 12mm thick CP (1:3) jointed with neat cement slurry mixed with pigments to match the shade of the tiles including cost, carriage, cost of all labour etc. complete.				
	Ground Floor	12.42	Sqm	1213.87	15076.00
17	Priming 1 coat with wall primer water bond cement primer including all labour, materials etc. complete.				
	Ground Floor	661.78	Sqm	76.47	50606.00
18	Wall painting 2 coats with plastic emulsion paint of approved shade on new work to give an even shade including cost of paint etc complete.				-
	Ground Floor	504.09	Sqm	102.84	51841.00
19	Wall painting two coat with any approved weather coat paint including cost of all materials, labor and T&P require for the work etc. complete as directed by the E.I.C.				
	Ground Floor	157.69	Sqm	95.95	15130.00
20	Supplying of M.S. Door, Window with grills, Grills made out of M.S. Angle frame, M.S. Flat, Sheet etc of approved section & design, electrically welded properly with all necessary locking arrangement, and 1 coat red oxide primer including cost of all materials, labour charges, carriage of materials to site etc. complete.	- 1551.0 0	Kg	88.14	136705.00
21	Pvc Door	2.00	Nos	5500.00	11000.00
22	Painting 2 coats with approved enamale paint to door & windows over one cote of primer.	94.59	Sqm	254.88	24109.00
23	20mm thick grading plaster in cm (1:4)over roof slab	140.20	Sqm	312.40	43798.00
	TOTAL (In Lakhs)				2407272.00

Total= Rs. 2407272.00

(Rupees Twentyfour Lakhs Seven Thousand Two Hundred Seventy Two) only

Approved for 23 (twenty three Items) only


Block Development Officer,
PATRAPUR

CONTRACTOR


Block Development Officer, PATRAPUR

CONSTRUCTION OF G.P.F. BUILDING AT JARADA UNDER PATRAPUR BLOCK



Percentage Rate Quoted in figure:-
Percentage Rate Quoted in Words:-
Total Tendered Amount:-

Total No. of Corrections.....
Total No. of Over writings.....
Total No. of Interpolation.....

Signature of the Contractor

1. In case of downloaded from official web site:

Cost of tender paper for the work "CONSTRUCTION OF GPLF BUILDING AT JARADA OF JARADA G.P UNDER PATRAPUR BLOCK

" for Rs.6,000.00 (Rupees Six Thousands) only vide Demand Draft No _____ -

Dt. _____.


Block Development Officer, PATRAPUR

For Office use only

- | | |
|---------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| 01. E.M.D. | Furnished / Not furnished
Rs. _____
In shape of _____
Pledged/Not Pledged |
| 02. Valid Registration certificate:- | Copy furnished/ Not furnished |
| 03. PAN Card:- | Copy furnished/ Not furnished |
| 04. GSTIN:- | Copy furnished/ Not furnished |
| 05. Nos. of Tender paper:- | _____ |
| 06. Cost of Tender paper in case of down loading i.e. Rs. _____ /- in shape of demand draft | |


Block Development Officer,
PATRAPUR

CONTRACTOR


Block Development Officer, PATRAPUR

CONSTRUCTION OF GPLF BUILDING AT JARADA UNDER PATRAPUR BLOCK

Issued to Sri.....Contractor.....
Class.....

SCHEDULE OF QUANTITY & ABSTRACT OF COST

Name of the Work: - CONSTRUCTION OF ADDITIONAL CLASS ROOM AT MAHADEIPUR U.P.S
OF AMBAPUR G.P UNDER PATRAPUR BLOCK

Estimated Cost: - Rs. 13,18,006.00

EMD: - Rs. 13,181.00

SI No	Description of Item	Qty	Unit	Rate	Amount
	Civil Work				
1	Earth Work in excavation of foundation in hard soil within initial leads of 50m & lifts of 1.5m including dressing and levelling of bed etc. and adding contractor's profit and over head charges, etc. complete in all respect.	47.84	Cum	270.90	12,960.78
2	Supplying & filling of foundation with course sand well watered and rammed including cost, cost of all labour, carriage, royalty complete in all respect.	51.89	Cum	744.20	38,618.72
3	Cement Concrete (1:3:6) using 40mm size hard granite C.B. metal approved quality from approved quarry including cost, carriage, royalty, cost of all labour. etc complete and as directed by E.I.C.	13.40	Cum	6020.30	80,665.40
4	R.C.C. M-20 grade with 20mm and down grade C.B. chips of approved quality from approved quarry including hoisting, laying hire charges of concrete mixture, vibrator, watering, curing and cost of all materials and labour, centering shuttering etc complete but excluding cost of reinforcement.				
	COLUMN BASES	12.30	cum	6283.80	77356.72
	Plinth Beam,	2.52	cum	7916.90	19,950.59
	Beam & Column	6.92	cum	18749.70	1,29,747.92
	Lintel	1.05	cum	16132.10	16,938.71
	Chajja	11.27	Sqm	1687.00	19010.41
	Slab	9.74	cum	17620.90	1,71,627.57
5	Straightening, cutting, bending bent up or coiled rods, including cranking, hooking, welding or jointing the M.S. rods or tor confirming to I.S. 432 (Plain) and 1785 (Tor) steel and binding, tying the grills, hoisting, lowering and placing in proper position required for R.C.C. works including cost,	34.79	Sqm	8668.37	301576.79

CONTRACTOR

Block Development Officer, PATRAPUR

CONSTRUCTION OF ADDL.CLASS ROOM AT MAHADEIPUR U.P.S UNDER PATRAPUR BLOCK



	conveyance and taxes of M.S. rods or tor steel and binding wires of 18 to 20 gauge and cost of all labour etc.complete in all respect.				
6	Brick Machinery work in Fly-ash Bricks of 23cm.x 11cm.x 8cm. size having crushing strength not less than 75 Kg/Cm2 in cement mortar (1:6) in superstructure including splays, cuttings, circular moldings, watering & curing for 7 days, cost, conveyance, taxes & royalties of all materials, labour with T&P etc. complete in all respect.				-
A)	Foundation and plinth	7.22	Cum	5425.30	39,144.58
B)	Super structure	18.08	Cum	5463.70	98,768.77
7	6 mm thick C.P.(1:4) finished smooth surface to RCC surface including watering, curing, cost, carriage, royalty of all materials, cost of all labour, etc complete as per the direction of E.I.C.	100.93	Sqm	200.40	20,225.50
8	12mm thick C.P.(1:6) on brick masonry to the smooth surface including watering, curing, cost, carriage, royalty of all materials, cost of all labour, etc complete as per the direction of E.I.C.	137.02	Sqm	190.30	26074.30
9	16mm thick C.P. (1:6) over brick masonry to the smooth surface including watering, curing cost, carriage, royalty, and taxes of all materials, cost of all labour, etc complete as per the direction of E.I.C.	136.99	Sqm	273.60	37,480.21
10	Supplying, fitting & fixing of 10 mm thick & size of 600x600 mm Glazed Vitrified floor tiles (GVT) of matt finish(WOODEN FINISH/RUSTIC FINISH) with veilcraft (VC) shield(Scratch free/stain free) with water absorption limit between 0.08% to 3% and conforming to IS : 15622:2006 (Group B Ib) laid on 20 mm thick cement mortar (1:4) and filling joints with white cement of approved quality including cost of all materials, etc. required for the work all complete as per direction of E.I.C.				
	Ground Floor	76.06	Sqm	1083.61	82419.60
11	Fixing of 10 mm thick & size of 600x600 mm Glazed Vitrified wall tiles (GVT) of matt finish(WOODEN FINISH/RUSTIC FINISH) with veilcraft (VC) shield(Scratch free/stain free) with water absorption limit between 0.08% to 3% and conforming to IS : 15622:2006 (Group B Ib) in dados skirting and risers of steps on 12mm thick CP (1:3) jointed with neat cement slurry mixed with pigments to match the shade of the tiles including cost, carriage, cost of all labour etc. complete.				-

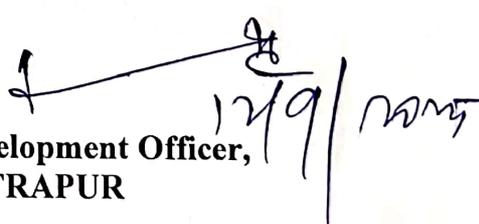
CONTRACTOR

Block Development Officer, PATRAPUR

	Ground Floor	8.36	Sqm	1328.80	11,110.10
12	Priming 1 coat with wall primer water bond cement primer including all labour, materials etc. complete.				
	Ground Floor	369.81	Sqm	72.70	26,885.19
13	Wall painting 2 coats with plastic emulsion paint of approved shade on new work to give an even shade including cost of paint etc complete.				-
	Ground Floor	232.80	Sqm	98.30	22,884.24
14	Wall painting two coat with any approved weather coat paint including cost of all materials, labor and T&P require for the work etc. complete as directed by the E.I.C.				
	Ground Floor	137.02	Sqm	75.50	10,344.77
15	Supplying of M.S. Door, Window with grills, Grills made out of M.S. Angle frame, M.S. Flat, Sheet etc of approved section & design, electrically welded properly with all necessary locking arrangement, and 1 coat red oxide primer including cost of all materials, labour charges, carriage of materials to site etc. complete.				
	M S Door & Window with grill	413.00	Kg	88.70	36633.10
16	Painting 2 coats with approved paint to door & windows over one cote of primer.	19.14	Sqm	226.31	4331.50
17	2.5 CM thick grading concrete (1:2:2) over roof slab	74.14	Sqm	436.70	33250.34
	TOTAL (In Lakhs)				13,18,006.00

Total= Rs. 13,18,006.00

(Rupees Thirteen lakhs Eighteen Thousand Six) only
Approved for 17 (Seventeen) items Only.


Block Development Officer,
PATRAPUR

Percentage Rate Quoted in figure:-
Percentage Rate Quoted in Words:-
Total Tendered Amount:-

Total No. of Corrections.....
Total No. of Over writings.....
Total No. of Interpolation.....

Signature of the Contractor

CONTRACTOR


Block Development Officer, PATRAPUR

1. In case of downloaded from official web site:

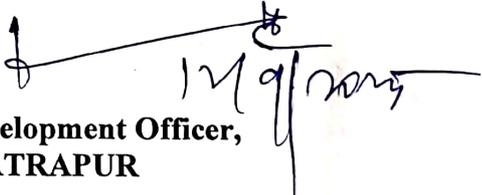
Cost of tender paper for the work "CONSTRUCTION OF ADDITIONAL CLASS ROOM AT MAHADEIPUR U.P.S OF AMBAPUR G.P UNDER PATRAPUR BLOCK" for Rs.6,000.00 (Rupees Six Thousands) only vide Demand Draft No _____ -

Dt. _____.


Block Development Officer, PATRAPUR

For Office use only

- | | |
|---------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| 01. E.M.D. | Furnished / Not furnished
Rs. _____
In shape of _____
Pledged/Not Pledged |
| 02. Valid Registration certificate:- | Copy furnished/ Not furnished |
| 03. PAN Card:- | Copy furnished/ Not furnished |
| 04. GSTIN:- | Copy furnished/ Not furnished |
| 05. Nos. of Tender paper:- | _____ |
| 06. Cost of Tender paper in case of down loading i.e. Rs. _____ /- in shape of demand draft | |


Block Development Officer,
PATRAPUR

CONTRACTOR


Block Development Officer, PATRAPUR

CONSTRUCTION OF ADDL.CLASS ROOM AT MAHADEIPUR U.P.S UNDER PATRAPUR BLOCK

Issued to Sri.....Contractor.....
Class.....

SCHEDULE OF QUANTITY & ABSTRACT OF COST

Name of the Work: - CONSTRUCTION OF ADDITIONAL CLASS ROOM AT BISHNU PRIYA BIDYAPITHA, KELUA OF PADADIGI G.P UNDER PATRAPUR BLOCK

Estimated Cost: - Rs. 14,35,979.00

EMD: - Rs. 14,360.00

SI No	Description of Item	Qty	Unit	Rate	Amount
	Civil Work				
1	Earth Work in excavation of foundation in hard soil within initial leads of 50m & lifts of 1.5m including dressing and levelling of bed etc. and adding contractor's profit and over head charges, etc. complete in all respect.	47.84	Cum	270.90	12,960.00
2	Supplying & filling of foundation with course sand well watered and rammed including cost, cost of all labour, carriage, royalty complete in all respect.	51.89	Cum	624.00	32,379.00
3	Cement Concrete (1:3:6) using 40mm size hard granite C.B. metal approved quality from approved quarry including cost, carriage, royalty, cost of all labour. etc complete and as directed by E.I.C.	13.40	Cum	5932.50	79,496.00
4	R.C.C. M-20 grade with 20mm and down grade C.B. chips of approved quality from approved quarry including hoisting, laying hire charges of concrete mixture, vibrator, watering, curing and cost of all materials and labour, centering shuttering etc complete but excluding cost of reinforcement.				-
	COLUMN UPTO PLINTH	12.31	Cum	6201.60	76,342.00
	Plinth Beam, Column and Base	2.52	Cum	7834.70	19,743.00
	Beam & Column	6.92	Cum	18667.40	1,29,178.00
	Lintel Verandah Beam	1.05	Cum	16049.80	16,852.00
	Chajja	11.27	Sqm	1681.70	18,953.00
	Slab	10.45	Cum	17538.60	1,83,278.00
5	Straightening, cutting, bending bent up or coiled rods, including cranking, hooking, welding or jointing the M.S. rods or tor confirming to I.S. 432 (Plain) and 1785 (Tor) steel and binding, tying the grills, hoisting, lowering and placing in proper position required for R.C.C. works including cost,	35.50	Qtn	8668.37	3,07,727.00

CONTRACTOR

Block Development Officer, PATRAPUR

CONSTRUCTION OF DAYCARE SUBCENTRE CUM HEALTH & WELLNESS CENTRE AT ANKULI UNDER PATRAPUR BLOCK



	conveyance and taxes of M.S. rods or tor steel and binding wires of 18 to 20 gauge and cost of all labour etc.complete in all respect.				
6	Brick Machinery work in Flyash Bricks of 23cm.x 11cm.x 8cm. size having crushing strength not less than 75 Kg/Cm ² in cement mortar (1:6) in Sub-structure including splays, cuttings, circular moldings, watering & curing for 7 days, cost, conveyance, taxes & royalties of all materials, labour with T&P etc. complete in all respect.				
a)	Sub structure	7.22	Cum	5306.80	38,315.00
b)	Superstructure	30.05	Cum	5345.10	1,60,620.00
7	Supplying of M.S. Door, Window with grills, Grills made out of M.S. Angle frame, M.S. Flat, Sheet etc of approved section & design, electrically welded properly with all necessary locking arrangement, and 1 coat red oxide primer including cost of all materials, labour charges, carriage of materials to site etc. complete.				
	M S Grills (Door & Window)	525.00	Kg	88.70	46,568.00
8	6mm thick C.P. (1:4) finishing smooth to RCC surface after cleaning the surface.	100.93	Sqm	198.50	20,035.00
9	16mm thick C.P. (1:6) over brick masonry to the smooth surface including watering, curing cost, carriage, royalty, and taxes of all materials, cost of all labour, etc complete as per the direction of E.I.C.	189.40	Sqm	269.10	50,968.00
10	12mm thick C.P.(1:6) on brick masonry to the smooth surface including watering, curing, cost, carriage, royalty of all materials, cost of all labour, etc complete as per the direction of E.I.C.	189.43	Sqm	186.50	35,329.00
11	2.5 C.M thick grading concrete over roof	76.14	Sqm	433	32,969.00
12	Supplying, fitting & fixing of 10 mm thick & size of 600x600 mm Glazed Vitrified floor tiles (GVT) of matt finish(WOODEN FINISH/RUSTIC FINISH) with veilcraft (VC) shield(Scratch free/stain free) with water absorption limit between 0.08% to 3% and conforming to IS : 15622:2006 (Group B Ib) laid on 20 mm thick cement mortar (1:4) and filling joints with white cement of approved quality including cost of all materials, etc. required for the work all complete as per direction of E.I.C.				

CONTRACTOR

Block Development Officer, PATRAPUR

	Rises	8.36	Sqm	1325.00	11,077.00
13	Fixing of 10 mm thick & size of 600x600 mm Glazed Vitrified wall tiles (GVT) of matt finish(WOODEN FINISH/RUSTIC FINISH) with veilcraft (VC) shield(Scratch free/stain free) with water absorption limit between 0.08% to 3% and conforming to IS : 15622:2006 (Group B Ib) in dados skirting and risers of steps on 12mm thick CP (1:3) jointed with neat cement slurry mixed with pigments to match the shade of the tiles including cost, carriage, cost of all labour etc. complete.				-
	Ground Floor	76.06	Sqm	1078.29	82,015.00
14	Priming 1 coat with wall primer water bond cement primer including all labour, materials etc. complete.				
	Ground Floor	474.63	Sqm	72.70	34,506.00
15	Wall painting 2 coats with plastic emulsion paint of approved shade on new work to give an even shade including cost of paint etc complete.				
	Ground Floor	285.2	Sqm	98.30	28,035.00
16	Painting two coat with any approved paint to door & windows over a coat of primer including all				
	Ground Floor	19.14	Sqm	226.31	4,332.00
17	Weather cot painting two course with approved shade over a cot of oil bound primer including cost of all materials T & P and labor etc. complete				
		189.43	Sqm	75.50	14,302.00
	TOTAL (In Lakhs)				14,35,979.00

Total= Rs. 14,35,979.00

(Rupees Fourteen lakhs Thirty Five Thousand Nine Hundred Seventy Nine) only
Approved for 17 (Seventeen) items Only.


Block Development Officer,
PATRAPUR

Percentage Rate Quoted in figure:-
Percentage Rate Quoted in Words:-
Total Tendered Amount:-

Total No. of Corrections.....
Total No. of Over writings.....

CONTRACTOR


Block Development Officer, PATRAPUR

CONSTRUCTION OF DAYCARE SUBCENTRE CUM HEALTH & WELLNESS CENTRE AT ANKULI UNDER PATRAPUR BLOCK



Percentage Rate Quoted in figure:-
Percentage Rate Quoted in Words:-
Total Tendered Amount:-

Total No. of Corrections.....
Total No. of Over writings.....
Total No. of Interpolation.....

Signature of the Contractor

1. In case of downloaded from official web site:

Cost of tender paper for the work "CONSTRUCTION OF ADDITIONAL CLASS ROOM OF BISHNUPRIYA BIDYAPITHA AT KELUA, OF PADADIGI G.P UNDER PATRAPUR BLOCK.

" for Rs.6,000.00 (Rupees Six Thousands) only vide Demand Draft No _____ -
Dt. _____.


Block Development Officer, PATRAPUR

For Office use only

- | | |
|---------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| 01. E.M.D. | Furnished / Not furnished
Rs. _____
In shape of _____
Pledged/Not Pledged |
| 02. Valid Registration certificate:- | Copy furnished/ Not furnished |
| 03. PAN Card:- | Copy furnished/ Not furnished |
| 04. GSTIN:- | Copy furnished/ Not furnished |
| 05. Nos. of Tender paper:- | _____ |
| 06. Cost of Tender paper in case of down loading i.e. Rs. _____ /- in shape of demand draft | |


**Block Development Officer,
PATRAPUR**

CONTRACTOR


Block Development Officer, PATRAPUR

CONSTRUCTION OF DAYCARE SUBCENTRE CUM HEALTH & WELLNESS CENTRE AT ANKULI UNDER PATRAPUR BLOCK



Issued to Sri.....Contractor.....
Class.....

SCHEDULE OF QUANTITY & ABSTRACT OF COST

Name of the Work: - CONSTRUCTION OF ADDITIONAL CLASS ROOM AT THANAGAON P.S
OF TUMBAGADA G.P UNDER PATRAPUR BLOCK

Estimated Cost: - Rs. 13,18,006.00

EMD: - Rs. 13,181.00

SI No	Description of Item	Qty	Unit	Rate	Amount
Civil Work					
1	Earth Work in excavation of foundation in hard soil within initial leads of 50m & lifts of 1.5m including dressing and levelling of bed etc. and adding contractor's profit and over head charges, etc. complete in all respect.	47.84	Cum	270.90	12,960.78
2	Supplying & filling of foundation with course sand well watered and rammed including cost, cost of all labour, carriage, royalty complete in all respect.	51.89	Cum	744.20	38,618.72
3	Cement Concrete (1:3:6) using 40mm size hard granite C.B. metal approved quality from approved quarry including cost, carriage, royalty, cost of all labour. etc complete and as directed by E.I.C.	13.40	Cum	6020.30	80,665.40
4	R.C.C. M-20 grade with 20mm and down grade C.B. chips of approved quality from approved quarry including hoisting, laying hire charges of concrete mixture, vibrator, watering, curing and cost of all materials and labour, centering shuttering etc complete but excluding cost of reinforcement.				-
	COLUMN BASES	12.30	cum	6283.80	77356.72
	Plinth Beam,	2.52	cum	7916.90	19,950.59
	Beam & Column	6.92	cum	18749.70	1,29,747.92
	Lintel	1.05	cum	16132.10	16,938.71
	Chajja	11.27	Sqm	1687.00	19010.41
	Slab	9.74	cum	17620.90	1,71,627.57
5	Straightening, cutting, bending bent up or coiled rods, including cranking, hooking, welding or jointing the M.S. rods or tor confirming to I.S. 432 (Plain) and 1785 (Tor) steel and binding, tying the grills, hoisting, lowering and placing in proper position required for R.C.C. works including cost,	34.79	Sqm	8668.37	301576.79

CONTRACTOR

Block Development Officer, PATRAPUR

CONSTRUCTION OF ADDL. CLASS ROOM AT THANAGAON P.S UNDER PATRAPUR BLOCK



	conveyance and taxes of M.S. rods or tor steel and binding wires of 18 to 20 gauge and cost of all labour etc. complete in all respect.				
6	Brick Machinery work in Fly-ash Bricks of 23cm.x 11cm.x 8cm. size having crushing strength not less than 75 Kg/Cm ² in cement mortar (1:6) in superstructure including splays, cuttings, circular moldings, watering & curing for 7 days, cost, conveyance, taxes & royalties of all materials, labour with T&P etc. complete in all respect.				-
A)	Foundation and plinth	7.22	Cum	5425.30	39,144.58
B)	Super structure	18.08	Cum	5463.70	98,768.77
7	6 mm thick C.P.(1:4) finished smooth surface to RCC surface including watering, curing, cost, carriage, royalty of all materials, cost of all labour, etc complete as per the direction of E.I.C.	100.93	Sqm	200.40	20,225.50
8	12mm thick C.P.(1:6) on brick masonry to the smooth surface including watering, curing, cost, carriage, royalty of all materials, cost of all labour, etc complete as per the direction of E.I.C.	137.02	Sqm	190.30	26074.30
9	16mm thick C.P. (1:6) over brick masonry to the smooth surface including watering, curing cost, carriage, royalty, and taxes of all materials, cost of all labour, etc complete as per the direction of E.I.C.	136.99	Sqm	273.60	37,480.21
10	Supplying, fitting & fixing of 10 mm thick & size of 600x600 mm Glazed Vitrified floor tiles (GVT) of matt finish(WOODEN FINISH/RUSTIC FINISH) with veilcraft (VC) shield(Scratch free/stain free) with water absorption limit between 0.08% to 3% and conforming to IS : 15622:2006 (Group B Ib) laid on 20 mm thick cement mortar (1:4) and filling joints with white cement of approved quality including cost of all materials, etc. required for the work all complete as per direction of E.I.C.				
	Ground Floor	76.06	Sqm	1083.61	82419.60
11	Fixing of 10 mm thick & size of 600x600 mm Glazed Vitrified wall tiles (GVT) of matt finish(WOODEN FINISH/RUSTIC FINISH) with veilcraft (VC) shield(Scratch free/stain free) with water absorption limit between 0.08% to 3% and conforming to IS : 15622:2006 (Group B Ib) in dados skirting and risers of steps on 12mm thick CP (1:3) jointed with neat cement slurry mixed with pigments to match the shade of the tiles including cost, carriage, cost of all labour etc. complete.				-

[Handwritten Signature]

CONTRACTOR

Block Development Officer, PATRAPUR

CONSTRUCTION OF ADDL. CLASS ROOM AT THANAGAON P.S UNDER PATRAPUR BLOCK



	Ground Floor	8.36	Sqm	1328.80	11,110.10
12	Priming 1 coat with wall primer water bond cement primer including all labour, materials etc. complete.				
	Ground Floor	369.81	Sqm	72.70	26,885.19
13	Wall painting 2 coats with plastic emulsion paint of approved shade on new work to give an even shade including cost of paint etc complete.				-
	Ground Floor	232.80	Sqm	98.30	22,884.24
14	Wall painting two coat with any approved weather coat paint including cost of all materials, labor and T&P require for the work etc. complete as directed by the E.I.C.				
	Ground Floor	137.02	Sqm	75.50	10,344.77
15	Supplying of M.S. Door, Window with grills, Grills made out of M.S. Angle frame, M.S. Flat, Sheet etc of approved section & design, electrically welded properly with all necessary locking arrangement, and 1 coat red oxide primer including cost of all materials, labour charges, carriage of materials to site etc. complete.				
	M S Door & Window with grill	413.00	Kg	88.70	36633.10
16	Painting 2 coats with approved paint to door & windows over one cote of primer.	19.14	Sqm	226.31	4331.50
17	2.5 CM thick grading concrete (1:2:2) over roof slab	74.14	Sqm	436.70	33250.34
	TOTAL (In Lakhs)				13,18,006.00

Total= Rs. 13,18,006.00

(Rupees Thirteen lakhs Eighteen Thousand Six) only

Approved for 17 (Seventeen) items Only.


Block Development Officer,
PATRAPUR

Percentage Rate Quoted in figure:-

Percentage Rate Quoted in Words:-

Total Tendered Amount:-

Total No. of Corrections.....

Total No. of Over writings.....

Total No. of Interpolation.....

Signature of the Contractor

CONTRACTOR


Block Development Officer, PATRAPUR

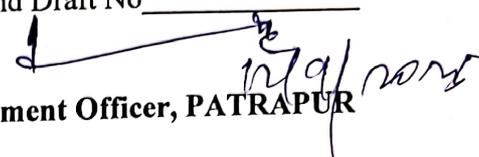
CONSTRUCTION OF ADDL. CLASS ROOM AT THANAGAON P.S UNDER PATRAPUR BLOCK



1. In case of downloaded from official web site:

Cost of tender paper for the work "CONSTRUCTION OF ADDITIONAL CLASS ROOM AT
THANAGAM P.S OF TUMBAGADA G.P UNDER PATRAPUR BLOCK
" for Rs.6,000.00 (Rupees Six Thousands) only vide Demand Draft No _____ -

Dt. _____.


Block Development Officer, PATRAPUR

For Office use only

01. E.M.D.

Furnished / Not furnished

Rs. _____

In shape of _____

Pledged/Not Pledged

02. Valid Registration certificate:-

Copy furnished/ Not furnished

03. PAN Card:-

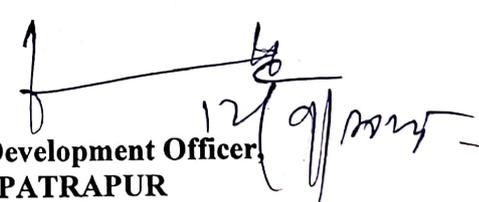
Copy furnished/ Not furnished

04. GSTIN:-

Copy furnished/ Not furnished

05. Nos. of Tender paper:-

06. Cost of Tender paper in case of down loading i.e. Rs. _____ /- in shape of
demand draft


Block Development Officer,
PATRAPUR

CONTRACTOR


Block Development Officer, PATRAPUR

CONSTRUCTION OF ADDL. CLASS ROOM AT THANAGAON P.S UNDER PATRAPUR BLOCK

Issued to Sri.....Contractor.....
Class.....

SCHEDULE OF QUANTITY & ABSTRACT OF COST

Name of the Work: - CONSTRUCTION OF ADDITIONAL CLASS ROOM AT BALIGAM P.S OF
TUMBAGADA G.P UNDER PATRAPUR BLOCK

Estimated Cost: - Rs. 13,18,006.00

EMD: - Rs. 13,181.00

Sl No	Description of Item	Qty	Unit	Rate	Amount
	Civil Work				
1	Earth Work in excavation of foundation in hard soil within initial leads of 50m & lifts of 1.5m including dressing and levelling of bed etc. and adding contractor's profit and overhead charges, etc. complete in all respect.	47.84	Cum	270.90	12,960.78
2	Supplying & filling of foundation with course sand well watered and rammed including cost, cost of all labour, carriage, royalty complete in all respect.	51.89	Cum	744.20	38,618.72
3	Cement Concrete (1:3:6) using 40mm size hard granite C.B. metal approved quality from approved quarry including cost, carriage, royalty, cost of all labour. etc complete and as directed by E.I.C.	13.40	Cum	6020.30	80,665.40
4	R.C.C. M-20 grade with 20mm and down grade C.B. chips of approved quality from approved quarry including hoisting, laying hire charges of concrete mixture, vibrator, watering, curing and cost of all materials and labour, centering shuttering etc complete but excluding cost of reinforcement.				-
	COLUMN BASES	12.30	cum	6283.80	77356.72
	Plinth Beam,	2.52	cum	7916.90	19,950.59
	Beam & Column	6.92	cum	18749.70	1,29,747.92
	Lintel	1.05	cum	16132.10	16,938.71
	Chajja	11.27	Sqm	1687.00	19010.41
	Slab	9.74	cum	17620.90	1,71,627.57
5	Straightening, cutting, bending bent up or coiled rods, including cranking, hooking, welding or jointing the M.S. rods or tor confirming to I.S. 432 (Plain) and 1785 (Tor) steel and binding, tying the grills, hoisting, lowering and placing in proper position required for R.C.C. works including cost,	34.79	Sqm	8668.37	301576.79

CONTRACTOR

Block Development Officer, PATRAPUR

CONSTRUCTION OF ADDL.CLASS ROOM AT BALIGAON P.S UNDER PATRAPUR BLOCK



	conveyance and taxes of M.S. rods or tor steel and binding wires of 18 to 20 gauge and cost of all labour etc.complete in all respect.				
6	Brick Machinery work in Fly-ash Bricks of 23cm.x 11cm.x 8cm. size having crushing strength not less than 75 Kg/Cm ² in cement mortar (1:6) in superstructure including splays, cuttings, circular moldings, watering & curing for 7 days, cost, conveyance, taxes & royalties of all materials, labour with T&P etc. complete in all respect.				-
A)	Foundation and plinth	7.22	Cum	5425.30	39,144.58
B)	Super structure	18.08	Cum	5463.70	98,768.77
7	6 mm thick C.P.(1:4) finished smooth surface to RCC surface including watering, curing, cost, carriage, royalty of all materials, cost of all labour, etc complete as per the direction of E.I.C.	100.93	Sqm	200.40	20,225.50
8	12mm thick C.P.(1:6) on brick masonry to the smooth surface including watering, curing, cost, carriage, royalty of all materials, cost of all labour, etc complete as per the direction of E.I.C.	137.02	Sqm	190.30	26074.30
9	16mm thick C.P. (1:6) over brick masonry to the smooth surface including watering, curing cost, carriage, royalty, and taxes of all materials, cost of all labour, etc complete as per the direction of E.I.C.	136.99	Sqm	273.60	37,480.21
10	Supplying, fitting & fixing of 10 mm thick & size of 600x600 mm Glazed Vitrified floor tiles (GVT) of matt finish(WOODEN FINISH/RUSTIC FINISH) with veilcraft (VC) shield(Scratch free/stain free) with water absorption limit between 0.08% to 3% and conforming to IS : 15622:2006 (Group B Ib) laid on 20 mm thick cement mortar (1:4) and filling joints with white cement of approved quality including cost of all materials, etc. required for the work all complete as per direction of E.I.C.				
	Ground Floor	76.06	Sqm	1083.61	82419.60
11	Fixing of 10 mm thick & size of 600x600 mm Glazed Vitrified wall tiles (GVT) of matt finish(WOODEN FINISH/RUSTIC FINISH) with veilcraft (VC) shield(Scratch free/stain free) with water absorption limit between 0.08% to 3% and conforming to IS : 15622:2006 (Group B Ib) in dados skirting and risers of steps on 12mm thick CP (1:3) jointed with neat cement slurry mixed with pigments to match the shade of the tiles including cost, carriage, cost of all labour etc. complete.				-

CONTRACTOR

Block Development Officer, PATRAPUR

CONSTRUCTION OF ADDL.CLASS ROOM AT BALIGAON P.S UNDER PATRAPUR BLOCK

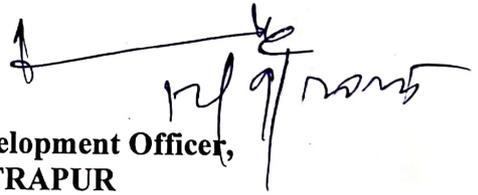


	Ground Floor	8.36	Sqm	1328.80	11,110.10
12	Priming 1 coat with wall primer water bond cement primer including all labour, materials etc. complete.				
	Ground Floor	369.81	Sqm	72.70	26,885.19
13	Wall painting 2 coats with plastic emulsion paint of approved shade on new work to give an even shade including cost of paint etc complete.				-
	Ground Floor	232.80	Sqm	98.30	22,884.24
14	Wall painting two coat with any approved weather coat paint including cost of all materials, labor and T&P require for the work etc. complete as directed by the E.I.C.				
	Ground Floor	137.02	Sqm	75.50	10,344.77
15	Supplying of M.S. Door, Window with grills, Grills made out of M.S. Angle frame, M.S. Flat, Sheet etc of approved section & design, electrically welded properly with all necessary locking arrangement, and 1 coat red oxide primer including cost of all materials, labour charges, carriage of materials to site etc. complete.	-			
	M S Door & Window with grill	413.00	Kg	88.70	36633.10
16	Painting 2 coats with approved paint to door & windows over one cote of primer.	19.14	Sqm	226.31	4331.50
17	2.5 CM thick grading concrete (1:2:2) over roof slab	74.14	Sqm	436.70	33250.34
	TOTAL (In Lakhs)				13,18,006.00

Total= Rs. 13,18,006.00

(Rupees Thirteen lakhs Eighteen Thousand Six) only

Approved for 17 (Seventeen) items Only.


Block Development Officer,
PATRAPUR

Percentage Rate Quoted in figure:-
Percentage Rate Quoted in Words:-
Total Tendered Amount:-

Total No. of Corrections.....

Total No. of Over writings.....

Total No. of Interpolation.....

Signature of the Contractor

CONTRACTOR


Block Development Officer, PATRAPUR

CONSTRUCTION OF ADDL.CLASS ROOM AT DALIGAON P.S UNDER PATRAPUR BLOCK



1. In case of downloaded from official web site:

Cost of tender paper for the work "CONSTRUCTION OF ADDITIONAL CLASS ROOM AT
BALIGAM P.S OF TUMBAGADA G.P UNDER PATRAPUR BLOCK
" for Rs.6,000.00 (Rupees Six Thousands) only vide Demand Draft No _____
Dt. _____.


Block Development Officer, PATRAPUR

For Office use only

- | | |
|---------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| 01. E.M.D. | Furnished / Not furnished
Rs. _____
In shape of _____
Pledged/Not Pledged |
| 02. Valid Registration certificate:- | Copy furnished/ Not furnished |
| 03. PAN Card:- | Copy furnished/ Not furnished |
| 04. GSTIN:- | Copy furnished/ Not furnished |
| 05. Nos. of Tender paper:- | _____ |
| 06. Cost of Tender paper in case of down loading i.e. Rs. _____ /- in shape of demand draft | |


Block Development Officer,
PATRAPUR

CONTRACTOR


Block Development Officer, PATRAPUR

CONSTRUCTION OF ADDL.CLASS ROOM AT BALIGAON P.S UNDER PATRAPUR BLOCK

Issued to Sri.....Contractor.....
Class.....

SCHEDULE OF QUANTITY & ABSTRACT OF COST

Name of the Work: - CONSTRUCTION OF ADDITIONAL CLASS ROOM AT JARADA P.S OF JARADAGADA G.P UNDER PATRAPUR BLOCK

Estimated Cost: - Rs. 13,18,006.00

EMD: - Rs. 13,181.00

SI No	Description of Item	Qty	Unit	Rate	Amount
	Civil Work				
1	Earth Work in excavation of foundation in hard soil within initial leads of 50m & lifts of 1.5m including dressing and levelling of bed etc. and adding contractor's profit and over head charges, etc. complete in all respect.	47.84	Cum	270.90	12,960.78
2	Supplying & filling of foundation with course sand well watered and rammed including cost, cost of all labour, carriage, royalty complete in all respect.	51.89	Cum	744.20	38,618.72
3	Cement Concrete (1:3:6) using 40mm size hard granite C.B. metal approved quality from approved quarry including cost, carriage, royalty, cost of all labour. etc complete and as directed by E.I.C.	13.40	Cum	6020.30	80,665.40
4	R.C.C. M-20 grade with 20mm and down grade C.B. chips of approved quality from approved quarry including hoisting, laying hire charges of concrete mixture, vibrator, watering, curing and cost of all materials and labour, centering shuttering etc complete but excluding cost of reinforcement.				
	COLUMN BASES	12.30	cum	6283.80	77356.72
	Plinth Beam,	2.52	cum	7916.90	19,950.59
	Beam & Column	6.92	cum	18749.70	1,29,747.92
	Lintel	1.05	cum	16132.10	16,938.71
	Chajja	11.27	Sqm	1687.00	19010.41
	Slab	9.74	cum	17620.90	1,71,627.57
5	Straightening, cutting, bending bent up or coiled rods, including cranking, hooking, welding or jointing the M.S. rods or tor confirming to I.S. 432 (Plain) and 1785 (Tor) steel and binding, tying the grills, hoisting, lowering and placing in proper position required for R.C.C. works including cost,	34.79	Sqm	8668.37	301576.79

CONTRACTOR

Block Development Officer, PATRAPUR

CONSTRUCTION OF ADDL.CLASS ROOM AT JARADA P.S UNDER PATRAPUR BLOCK

	conveyance and taxes of M.S. rods or tor steel and binding wires of 18 to 20 gauge and cost of all labour etc.complete in all respect.				
6	Brick Machinery work in Fly-ash Bricks of 23cm.x 11cm.x 8cm. size having crushing strength not less than 75 Kg/Cm ² in cement mortar (1:6) in superstructure including splays, cuttings, circular moldings, watering & curing for 7 days, cost, conveyance, taxes & royalties of all materials, labour with T&P etc. complete in all respect.				-
A)	Foundation and plinth	7.22	Cum	5425.30	39,144.58
B)	Super structure	18.08	Cum	5463.70	98,768.77
7	6 mm thick C.P.(1:4) finished smooth surface to RCC surface including watering, curing, cost, carriage, royalty of all materials, cost of all labour, etc complete as per the direction of E.I.C.	100.93	Sqm	200.40	20,225.50
8	12mm thick C.P.(1:6) on brick masonry to the smooth surface including watering, curing, cost, carriage, royalty of all materials, cost of all labour, etc complete as per the direction of E.I.C.	137.02	Sqm	190.30	26074.30
9	16mm thick C.P. (1:6) over brick masonry to the smooth surface including watering, curing cost, carriage, royalty, and taxes of all materials, cost of all labour, etc complete as per the direction of E.I.C.	136.99	Sqm	273.60	37,480.21
10	Supplying, fitting & fixing of 10 mm thick & size of 600x600 mm Glazed Vitrified floor tiles (GVT) of matt finish(WOODEN FINISH/RUSTIC FINISH) with veilcraft (VC) shield(Scratch free/stain free) with water absorption limit between 0.08% to 3% and conforming to IS : 15622:2006 (Group B Ib) laid on 20 mm thick cement mortar (1:4) and filling joints with white cement of approved quality including cost of all materials, etc. required for the work all complete as per direction of E.I.C.				
	Ground Floor	76.06	Sqm	1083.61	82419.60
11	Fixing of 10 mm thick & size of 600x600 mm Glazed Vitrified wall tiles (GVT) of matt finish(WOODEN FINISH/RUSTIC FINISH) with veilcraft (VC) shield(Scratch free/stain free) with water absorption limit between 0.08% to 3% and conforming to IS : 15622:2006 (Group B Ib) in dados skirting and risers of steps on 12mm thick CP (1:3) jointed with neat cement slurry mixed with pigments to match the shade of the tiles including cost, carriage, cost of all labour etc. complete.				-

CONTRACTOR

Block Development Officer, PATRAPUR

[Signature]
12/9/2025

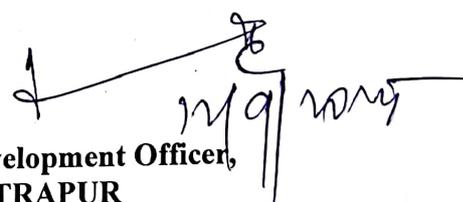
CONSTRUCTION OF ADDL.CLASS ROOM AT JARADA P.S UNDER PATRAPUR BLOCK



	Ground Floor	8.36	Sqm	1328.80	11,110.10
12	Priming 1 coat with wall primer water bond cement primer including all labour, materials etc. complete.				
	Ground Floor	369.81	Sqm	72.70	26,885.19
13	Wall painting 2 coats with plastic emulsion paint of approved shade on new work to give an even shade including cost of paint etc complete.				-
	Ground Floor	232.80	Sqm	98.30	22,884.24
14	Wall painting two coat with any approved weather coat paint including cost of all materials, labor and T&P require for the work etc. complete as directed by the E.I.C.				
	Ground Floor	137.02	Sqm	75.50	10,344.77
15	Supplying of M.S. Door, Window with grills, Grills made out of M.S. Angle frame, M.S. Flat, Sheet etc of approved section & design, electrically welded properly with all necessary locking arrangement, and 1 coat red oxide primer including cost of all materials, labour charges, carriage of materials to site etc. complete.				
	M S Door & Window with grill	413.00	Kg	88.70	36633.10
16	Painting 2 coats with approved paint to door & windows over one cote of primer.	19.14	Sqm	226.31	4331.50
17	2.5 CM thick grading concrete (1:2:2) over roof slab	74.14	Sqm	436.70	33250.34
	TOTAL (In Lakhs)				13,18,006.00

Total= Rs. 13,18,006.00

(Rupees Thirteen lakhs Eighteen Thousand Six) only
Approved for 17 (Seventeen) items Only.


Block Development Officer,
PATRAPUR

Percentage Rate Quoted in figure:-
Percentage Rate Quoted in Words:-
Total Tendered Amount:-

Total No. of Corrections.....
Total No. of Over writings.....
Total No. of Interpolation.....

Signature of the Contractor

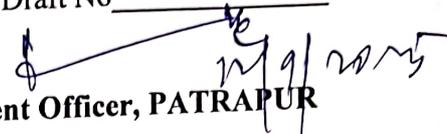

Block Development Officer, PATRAPUR

CONTRACTOR

1. In case of downloaded from official web site:

Cost of tender paper for the work "CONSTRUCTION OF ADDITIONAL CLASS ROOM AT JARADA P.S OF JARADAGADA G.P UNDER PATRAPUR BLOCK" for Rs.6,000.00 (Rupees Six Thousands) only vide Demand Draft No _____

Dt. _____


Block Development Officer, PATRAPUR

For Office use only

01. E.M.D.

Furnished / Not furnished

Rs. _____

In shape of _____

Pledged/Not Pledged

02. Valid Registration certificate:-

Copy furnished/ Not furnished

03. PAN Card:-

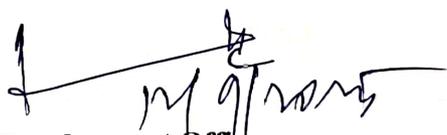
Copy furnished/ Not furnished

04. GSTIN:-

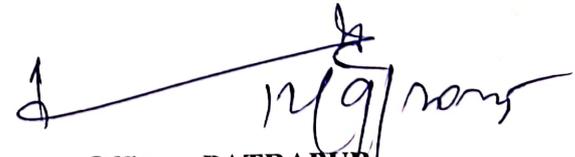
Copy furnished/ Not furnished

05. Nos. of Tender paper:-

06. Cost of Tender paper in case of down loading i.e. Rs. _____ /- in shape of demand draft


Block Development Officer,
PATRAPUR

CONTRACTOR


Block Development Officer, PATRAPUR

CONSTRUCTION OF ADDL.CLASS ROOM AT JARADA P.S UNDER PATRAPUR BLOCK