



## OFFICE OF THE PANCHAYAT SAMITI, PATRAPUR

No: 3052

Date: 12.9.2025

### DETAIL TENDER CALL NOTICE No. 02/2025-26

The Block Development Officer, Patrapur on behalf of Governor of Odisha invites sealed tender in confirming with sealed tender call notice in single cover system from registered and eligible class of civil contractor of the state PWD or equivalent class of (R&B)/Water Resources/Rural Works/M.I/C.P.W.D/Central Govt./State Govt. undertaking for the following work eventually to be drawn up in the percent rate contractor form (P-1).

| Sl no. | Name of the Work  | Value of work(InRs) | EMD In Rs. | Cost of Tender paper (Non-Refundable) | Class of Bidder | Period of completion   |
|--------|---|---------------------|------------|---------------------------------------|-----------------|------------------------|
| 1      | Construction of Addl. Class room at Baligaon, P.S under Tumba G.P                       | 1318006/-           | 13181/-    | 6000/-                                | 'D' & 'C' Class | 6 (Six) Calendar month |
| 2      | Construction of Addl. Class room at Thanagaon P.S under Tumbagada G.P                   | 1318006/-           | 13181/-    | 6000/-                                | 'D' & 'C' Class | 6 (Six) Calendar month |
| 3      | Construction of Addl. Class room at Jarada P.S Under Jaradagada G.P                     | 1318006/-           | 13181/-    | 6000/-                                | 'D' & 'C' Class | 6 (Six) Calendar month |
| 4      | Construction of Addl. Class room at Bishnu Priya Bidyapitha at Kelua under Padadigi G.P | 1435979/-           | 14360/-    | 6000/-                                | 'D' & 'C' Class | 6 (Six) Calendar month |
| 5      | Construction of Addl. Class room at Mahadeipur UPS under Ambapur G.P                    | 1318006/-           | 13181/-    | 6000/-                                | 'D' & 'C' Class | 6 (Six) Calendar month |
| 6      | Construction of GPLF Office building with Market Complex at Jarada                      | 2407272/-           | 24073/-    | 6000/-                                | 'C' & 'B' Class | 6 (Six) Calendar month |

### Terms and Conditions:

- 1. Cost of Tender paper :** The Tender paper & specifications can be obtained from the official website of Ganjam i.e. [www.ganjam.nic.in](http://www.ganjam.nic.in) from 15.09.2025.
- 2. Date of receipt and mode of submission of Tender papers :** The Tenderers have to submit the sealed tender papers in complete shape through Registered Post/Speed post only, in the addressed to the B.D.O, Patrapur. The last date of receipt of tender papers is **04.10.2025 up to 5.00 P.M.** The undersigned will not be responsible for postal delay if any or non receipt of the papers in time. **The tenders must super scribe the name of the work/project on the sealed envelope.**

3. **Date of Opening of Tender Paper:** The tender paper shall be opened on 06.10.2025 at 04.00 P.M in the presence of the tenderers or their authorized representative having written authorization for the purpose and the members of tender committee.

4. **Earnest Money Deposit :** 1%(one percent) of the bid value in shape of post office Term Deposit / Short Term Deposit/N.S.C/K.V.P/Deposit Receipt of any Nationalized bank duly pledged in favour of **Block Development Officer, Patrapur**. The Tender papers without required amount of E.M.D. will not be considered and transfer or adjustment of E.M.D is also inadmissible.

5. **Documents to be attached:** The following documents should be furnished with the tender papers failing which the tender will be liable to rejection.

(a) E.M.D. pledged in favour of the Block Development Officer, Patrapur.

(b) Cost of tender paper in shape of B.D in favour of the B.D.O., Patrapur

(c) Attested copy of Contractor Registration Certificate.

(d) Attested copy of PAN card and Certificate of GSTIN.

(e) Attested copy of caste certificate issued by competent authorities in case of SC/ST contractors desirous of availing preference.

(f) The bidders have to produce an original affidavit in support of the authenticity of documents etc attached with the tender papers.

(g) Affidavit as regards the facts of availing award of work without submission of EMD/ISD during the current financial year in case of Engineer Contractors desirous of availing exemption of EMD otherwise their tender paper will be liable for rejection.

(h) Joint venture consortium agreements are not allowed to participate in tender.

6. Shortfall of any required document(s) and EMD, the tender paper will be liable for rejection.

7. **Additional Performance Security Deposit :** The affidavit in lieu of APS will be submitted by the successful bidder for the cost of less quoted in percentage of the amount put to tender before the signing of the agreement of the contract.(Vide Works Department Letter No.-13286 Date-07/09/2017, Govt. of Odisha, Works Department.)

8. **Forfeiture:** The EMD amount will be forfeited, if the tenderer backs out from the offer acceptance of tender, by the competent authority.

9. Submission of more than one tender paper by a bidder for a single work will be liable for rejection of all such tender papers.

10. The Block Development Officer, Patrapur reserves the right to reject any or all the tenders without assigning any reasons thereof. Other details can be seen in the bidding documents.

  
Block Development Officer  
Patrapur.

Memo No. 3053

Date: 12.9.2025

Copy submitted to the Director, Information and Public Relations Department Govt. Of Odisha, Bhubaneswar for kind information and requested to publish the above tender call notice in two daily Odia news paper for wide publicity in minimum space on or before 15.09.2025.

  
Block Development Officer  
Patrapur

Memo No 3054

Date: 12.9.2025

Copy submitted to the Collector, Ganjam /CDO-Cum-Executive Officer, Zilla Parishad, Ganjam/ DPC,SSA Ganjam / DI & PRO, Ganjam for favour of kind information and necessary action.

  
Block Development Officer  
Patrapur

Memo No 3055

Date: 12.9.2025

Copy to the Tahasildar Patrapur / Executive Engineer, Zill Parishad, Ganjam / S.E. RWS & S, Berhampur /S.E., R & B Division, Berhampur / S.E., M.I. Division, Berhampur / S.E., R.W. Division, Berhampur / All BDOs of Ganjam District for information and necessary action with request to display in their Notice board for wide publicity.

  
Block Development Officer  
Patrapur

Memo No 3056

Date: 12.9.2025

Copy to N.I.C., Ganjam for uploading the detail tender call notice and the bid documents in the official website of Ganjam i.e. www.ganjam.nic.in.

  
Block Development Officer  
Patrapur

Memo No 3057

Date: 12.9.2025

Copy to Office Notice Board and tender file of Patrapur Block for uploading the DTCN and bid documents at NIC, Ganjam.

  
Block Development Officer  
Patrapur

Issued to Sri.....Contractor.....  
Class.....

**SCHEDULE OF QUANTITY & ABSTRACT OF COST**

Name of the Work: - CONSTRUCTION OF GPLF BUILDING AT JARADA OF JARADA G.P  
UNDER PATRAPUR BLOCK

Estimated Cost: - Rs. 24,07,272.00

EMD: - Rs. 24,073.00

| Sl No | Description of Item   | Qnty   | Unit | Rate    | Amount    |
|-------|---|--------|------|---------|-----------|
|       | Civil Work  |        |      |         |           |
| 1     | Earth Work in excavation of foundation in hard soil within initial leads of 50m & lifts of 1.5m including dressing and levelling of bed etc. and adding contractor's profit and over head charges, etc. complete in all respect.  | 58.50  | Cum  | 270.90  | 15,848.00 |
| 2     | Supplying & filling of foundation with course sand well watered and rammed including cost, cost of all labour, carriage, royalty complete in all respect.   | 57.63  | Cum  | 1330.17 | 76,658.00 |
| 3     | Cement Concrete (1:3:6) using 40mm size hard granite C.B. metal approved quality from approved quarry including cost, carriage, royalty, cost of all labour. etc complete and as directed by E.I.C.   | 19.00  | Cum  | 6229.51 | 118361.00 |
| 4     | CC(1:2:4) using 12mm size chips   | 0.60   | Cum  | 8067.27 | 4840.00   |
| 5     | R.C.C. M-20 grade with 20mm and down grade C.B. chips of approved quality from approved quarry including hoisting, laying hire charges of concrete mixture, vibrator, watering, curing and cost of all materials and labour, centering shuttering etc complete but excluding cost of reinforcement. | 50.60  | cum  | 6624.39 | 335194.00 |
| 6     | Rigid smooth centering & shuttering   |        |      |         |           |
| A     | Foundation & plinth   | 48.00  | Sqm  | 247.51  | 11880.00  |
| B     | R.C.C Beam & Column   | 183.78 | sqm  | 1189.28 | 218566.00 |
| C     | Lintel  | 34.06  | sqm  | 570.30  | 19424.00  |
| D     | Slab,landing,balconies, sun shades & Chajja   | 131.13 | Sqm  | 755.72  | 99098.00  |
| E     | Stair   | 6.20   | sqm  | 1043.30 | 6468.00   |
| 7     | Straightening, cutting, bending bent up or coiled rods, including cranking, hooking, welding or jointing the M.S. rods or tor confirming to I.S. 432 (Plain) and 1785 (Tor) steel and binding, tying the grills, hoisting,  | 57.282 | qntl | 8674.68 | 496901.00 |

CONTRACTOR

Block Development Officer, PATRAPUR

CONSTRUCTION OF GPLF BUILDING AT JARADA UNDER PATRAPUR BLOCK



|    |   |        |     |         |           |
|----|---|--------|-----|---------|-----------|
|    | lowering and placing in proper position required for R.C.C. works including cost, conveyance and taxes of M.S. rods or tor steel and binding wires of 18 to 20 gauge and cost of all labour etc.complete in all respect.  |        |     |         |           |
| 8  | Brick Machinery work in Fly-ash Bricks of 23cm.x 11cm.x 8cm. size having crushing strength not less than 75 Kg/Cm2 in cement mortar (1:6) in superstructure including splays, cuttings, circular moldings, watering & curing for 7 days, cost, conveyance, taxes & royalties of all materials, labour with T&P etc. complete in all respect.  |        |     |         |           |
| A) | Foundation and plinth   | 17.10  | Cum | 5611.18 | 95951.00  |
| 9  | Super structure   | 41.25  | Cum | 5644.18 | 232822.00 |
| 10 | 6 mm thick C.P.(1:4) finished smooth surface to RCC surface including watering, curing, cost, carriage, royalty of all materials, cost of all labour, etc complete as per the direction of E.I.C.   | 131.22 | Sqm | 216.31  | 28384.00  |
| 11 | 12mm thick C.P.(1:6) on brick masonry to the smooth surface including watering, curing, cost, carriage, royalty of all materials, cost of all labour, etc complete as per the direction of E.I.C.   | 157.69 | Sqm | 199.04  | 31387.00  |
| 12 | 16mm thick C.P. (1:6) over brick masonry to the smooth surface including watering, curing cost, carriage, royalty, and taxes of all materials, cost of all labour, etc complete as per the direction of E.I.C.  | 398.82 | Sqm | 284.15  | 113325.00 |
| 13 | Supplying ,fitting &fixing of vitrified industrial tiles in floor   | 10.84  | Sqm | 1044.28 | 11320.00  |
| 14 | Fixing the glazed tiles on walls over 12mm thick c.p (1:3)  | 30.67  | Sqm | 903.24  | 27702.00  |
| 15 | Supplying, fitting & fixing of 10 mm thick & size of 600x600 mm Glazed Vitrified floor tiles (GVT) of matt finish(WOODEN FINISH/RUSTIC FINISH) with veilcraft (VC) shield( Scratch free/stain free) with water absorption limit between 0.08% to 3% and conforming to IS : 15622:2006 (Group B Ib) laid on 20 mm thick cement mortar (1:4) and filling joints with white cement of approved quality including cost of all materials, etc. required for the work all complete as per direction of E.I.C. |        |     |         |           |
|    | Ground Floor  | 96.72  | Sqm | 1187.74 | 114878.00 |
| 16 | Fixing of 10 mm thick & size of 600x600 mm Glazed Vitrified wall tiles (GVT) of matt finish(WOODEN FINISH/RUSTIC FINISH) with veilcraft (VC) shield( Scratch free/stain free) with  |        |     |         |           |

CONTRACTOR

Block Development Officer, PATRAPUR

CONSTRUCTION OF GPLF BUILDING AT JARADA UNDER PATRAPUR BLOCK

|    |  |         |     |         |                   |
|----|--|---------|-----|---------|-------------------|
|    | water absorption limit between 0.08% to 3% and conforming to IS : 15622:2006 (Group B lb) in dados skirting and risers of steps on 12mm thick CP (1:3) jointed with neat cement slurry mixed with pigments to match the shade of the tiles including cost, carriage, cost of all labour etc. complete.                             |         |     |         |                   |
|    | Ground Floor   | 12.42   | Sqm | 1213.87 | 15076.00          |
| 17 | Priming 1 coat with wall primer water bond cement primer including all labour, materials etc. complete.  |         |     |         |                   |
|    | Ground Floor   | 661.78  | Sqm | 76.47   | 50606.00          |
| 18 | Wall painting 2 coats with plastic emulsion paint of approved shade on new work to give an even shade including cost of paint etc complete.  |         |     |         | -                 |
|    | Ground Floor   | 504.09  | Sqm | 102.84  | 51841.00          |
| 19 | Wall painting two coat with any approved weather coat paint including cost of all materials, labor and T&P require for the work etc. complete as directed by the E.I.C.  |         |     |         |                   |
|    | Ground Floor   | 157.69  | Sqm | 95.95   | 15130.00          |
| 20 | Supplying of M.S. Door, Window with grills, Grills made out of M.S. Angle frame, M.S. Flat, Sheet etc of approved section & design, electrically welded properly with all necessary locking arrangement, and 1 coat red oxide primer including cost of all materials, labour charges, carriage of materials to site etc. complete. | 1551.00 | Kg  | 88.14   | 136705.00         |
| 21 | Pvc Door   | 2.00    | Nos | 5500.00 | 11000.00          |
| 22 | Painting 2 coats with approved enamale paint to door & windows over one cote of primer.  | 94.59   | Sqm | 254.88  | 24109.00          |
| 23 | 20mm thick grading plaster in cm (1:4)over roof slab   | 140.20  | Sqm | 312.40  | 43798.00          |
|    | <b>TOTAL (In Lakhs)</b>  |         |     |         | <b>2407272.00</b> |

Total= Rs. 2407272.00

(Rupees Twentyfour Lakhs Seven Thousand Two Hundred Seventy Two) only  
Approved for 23 (twenty three Items) only

  
Block Development Officer,  
PATRAPUR

CONTRACTOR

  
Block Development Officer, PATRAPUR

CONSTRUCTION OF GPLF BUILDING AT JARADA UNDER PATRAPUR BLOCK

|                                    |
|------------------------------------|
| Percentage Rate Quoted in figure:- |
| Percentage Rate Quoted in Words:-  |
| Total Tendered Amount:-            |

Total No. of Corrections.....  
 Total No. of Over writings.....  
 Total No. of Interpolation.....

**Signature of the Contractor**

1. In case of downloaded from official web site:

Cost of tender paper for the work "CONSTRUCTION OF GPLF BUILDIND AT JARADA  
 OF JARADA G.P UNDER PATRAPUR BLOCK

" for Rs.6,000.00 (Rupees Six Thousands) only vide Demand Draft No \_\_\_\_\_ -

Dt. \_\_\_\_\_.

*[Signature]*  
 Block Development Officer, PATRAPUR

**For Office use only**

- |   |  |
|---|--|
| 01. E.M.D.  | Furnished / Not furnished<br>Rs. _____<br>In shape of _____<br>Pledged/Not Pledged |
| 02. Valid Registration certificate:-  | Copy furnished/ Not furnished  |
| 03. PAN Card:-  | Copy furnished/ Not furnished  |
| 04. GSTIN:-   | Copy furnished/ Not furnished  |
| 05. Nos. of Tender paper:-  | _____  |
| 06. Cost of Tender paper in case of down loading i.e. Rs. _____ /- in shape of demand draft |  |

*[Signature]*  
 Block Development Officer,  
 PATRAPUR

**CONTRACTOR**

*[Signature]*  
 Block Development Officer, PATRAPUR

CONSTRUCTION OF GPLF BUILDING AT JARADA UNDER PATRAPUR BLOCK

Issued to Sri.....Contractor.....  
Class.....

**SCHEDULE OF QUANTITY & ABSTRACT OF COST**

Name of the Work: - CONSTRUCTION OF ADDITIONAL CLASS ROOM AT MAHADEIPUR U.P.S  
OF AMBAPUR G.P UNDER PATRAPUR BLOCK

Estimated Cost: - Rs. 13,18,006.00

EMD: - Rs. 13,181.00

| SI No | Description of Item  | Qty   | Unit | Rate     | Amount      |
|-------|--|-------|------|----------|-------------|
|       | Civil Work   |       |      |          |             |
| 1     | Earth Work in excavation of foundation in hard soil within initial leads of 50m & lifts of 1.5m including dressing and levelling of bed etc. and adding contractor's profit and overhead charges, etc. complete in all respect.  | 47.84 | Cum  | 270.90   | 12,960.78   |
| 2     | Supplying & filling of foundation with coarse sand well watered and rammed including cost, cost of all labour, carriage, royalty complete in all respect.  | 51.89 | Cum  | 744.20   | 38,618.72   |
| 3     | Cement Concrete (1:3:6) using 40mm size hard granite C.B. metal approved quality from approved quarry including cost, carriage, royalty, cost of all labour. etc complete and as directed by E.I.C.  | 13.40 | Cum  | 6020.30  | 80,665.40   |
| 4     | R.C.C. M-20 grade with 20mm and down grade C.B. chips of approved quality from approved quarry including hoisting, laying hire charges of concrete mixture, vibrator, watering, curing and cost of all materials and labour, centering shuttering etc complete but excluding cost of reinforcement.          |       |      |          |             |
|       | COLUMN BASES   | 12.30 | cum  | 6283.80  | 77356.72    |
|       | Plinth Beam,   | 2.52  | cum  | 7916.90  | 19,950.59   |
|       | Beam & Column  | 6.92  | cum  | 18749.70 | 1,29,747.92 |
|       | Lintel   | 1.05  | cum  | 16132.10 | 16,938.71   |
|       | Chajja   | 11.27 | Sqm  | 1687.00  | 19010.41    |
|       | Slab   | 9.74  | cum  | 17620.90 | 1,71,627.57 |
| 5     | Straightening, cutting, bending bent up or coiled rods, including cranking, hooking, welding or jointing the M.S. rods or tor confirming to I.S. 432 (Plain) and 1785 (Tor) steel and binding, tying the grills, hoisting, lowering and placing in proper position required for R.C.C. works including cost, | 34.79 | Sqm  | 8668.37  | 301576.79   |

CONTRACTOR

Block Development Officer, PATRAPUR

CONSTRUCTION OF ADDL.CLASS ROOM AT MAHADEIPUR U.P.S UNDER PATRAPUR BLOCK

|    |   |        |     |         |           |
|----|---|--------|-----|---------|-----------|
|    | conveyance and taxes of M.S. rods or tor steel and binding wires of 18 to 20 gauge and cost of all labour etc.complete in all respect.  |        |     |         |           |
| 6  | Brick Machinery work in Fly-ash Bricks of 23cm.x 11cm.x 8cm. size having crushing strength not less than 75 Kg/Cm <sup>2</sup> in cement mortar (1:6) in superstructure including splays, cuttings, circular moldings, watering & curing for 7 days, cost, conveyance, taxes & royalties of all materials, labour with T&P etc. complete in all respect.  |        |     |         | -         |
| A) | Foundation and plinth   | 7.22   | Cum | 5425.30 | 39,144.58 |
| B) | Super structure   | 18.08  | Cum | 5463.70 | 98,768.77 |
| 7  | 6 mm thick C.P.(1:4) finished smooth surface to RCC surface including watering, curing, cost, carriage, royalty of all materials, cost of all labour, etc complete as per the direction of E.I.C.   | 100.93 | Sqm | 200.40  | 20,225.50 |
| 8  | 12mm thick C.P.(1:6) on brick masonry to the smooth surface including watering, curing, cost, carriage, royalty of all materials, cost of all labour, etc complete as per the direction of E.I.C.   | 137.02 | Sqm | 190.30  | 26074.30  |
| 9  | 16mm thick C.P. (1:6) over brick masonry to the smooth surface including watering, curing cost, carriage, royalty, and taxes of all materials, cost of all labour, etc complete as per the direction of E.I.C.  | 136.99 | Sqm | 273.60  | 37,480.21 |
| 10 | Supplying, fitting & fixing of 10 mm thick & size of 600x600 mm Glazed Vitrified floor tiles (GVT) of matt finish(WOODEN FINISH/RUSTIC FINISH) with veilcraft (VC) shield( Scratch free/stain free) with water absorption limit between 0.08% to 3% and conforming to IS : 15622:2006 (Group B Ib) laid on 20 mm thick cement mortar (1:4) and filling joints with white cement of approved quality including cost of all materials, etc. required for the work all complete as per direction of E.I.C. |        |     |         |           |
|    | Ground Floor  | 76.06  | Sqm | 1083.61 | 82419.60  |
| 11 | Fixing of 10 mm thick & size of 600x600 mm Glazed Vitrified wall tiles (GVT) of matt finish(WOODEN FINISH/RUSTIC FINISH) with veilcraft (VC) shield( Scratch free/stain free) with water absorption limit between 0.08% to 3% and conforming to IS : 15622:2006 (Group B Ib) in dados skirting and risers of steps on 12mm thick CP (1:3) jointed with neat cement slurry mixed with pigments to match the shade of the tiles including cost, carriage, cost of all labour etc. complete.               |        |     |         | -         |

CONTRACTOR

Block Development Officer, PATRAPUR

|    |  |        |     |         |                     |
|----|--|--------|-----|---------|---------------------|
|    | Ground Floor   | 8.36   | Sqm | 1328.80 | 11,110.10           |
| 12 | Priming 1 coat with wall primer water bond cement primer including all labour, materials etc. complete.  |        |     |         |                     |
|    | Ground Floor   | 369.81 | Sqm | 72.70   | 26,885.19           |
| 13 | Wall painting 2 coats with plastic emulsion paint of approved shade on new work to give an even shade including cost of paint etc complete.  |        |     |         | -                   |
|    | Ground Floor   | 232.80 | Sqm | 98.30   | 22,884.24           |
| 14 | Wall painting two coat with any approved weather coat paint including cost of all materials, labor and T&P require for the work etc. complete as directed by the E.I.C.  |        |     |         |                     |
|    | Ground Floor   | 137.02 | Sqm | 75.50   | 10,344.77           |
| 15 | Supplying of M.S. Door, Window with grills, Grills made out of M.S. Angle frame, M.S. Flat, Sheet etc of approved section & design, electrically welded properly with all necessary locking arrangement, and 1 coat red oxide primer including cost of all materials, labour charges, carriage of materials to site etc. complete. |        |     |         |                     |
|    | M S Door & Window with grill   | 413.00 | Kg  | 88.70   | 36633.10            |
| 16 | Painting 2 coats with approved paint to door & windows over one cote of primer.  | 19.14  | Sqm | 226.31  | 4331.50             |
| 17 | 2.5 CM thick grading concrete (1:2:2) over roof slab   | 74.14  | Sqm | 436.70  | 33250.34            |
|    | <b>TOTAL (In Lakhs)</b>  |        |     |         | <b>13,18,006.00</b> |

Total= Rs. 13,18,006.00

(Rupees Thirteen lakhs Eighteen Thousand Six) only

Approved for 17 (Seventeen) items Only.

Block Development Officer,  
PATRAPUR

Percentage Rate Quoted in figure:-

Percentage Rate Quoted in Words:-

Total Tendered Amount:-

Total No. of Corrections.....

Total No. of Over writings.....

Total No. of Interpolation.....

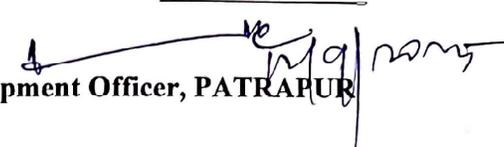
Signature of the Contractor

CONTRACTOR

Block Development Officer, PATRAPUR

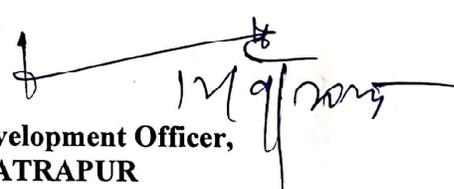
1. In case of downloaded from official web site:

Cost of tender paper for the work "CONSTRUCTION OF ADDITIONAL CLASS ROOM AT MAHADEIPUR U.P.S OF AMBAPUR G.P UNDER PATRAPUR BLOCK" for Rs.6,000.00 (Rupees Six Thousands) only vide Demand Draft No \_\_\_\_\_ -  
Dt. \_\_\_\_\_.

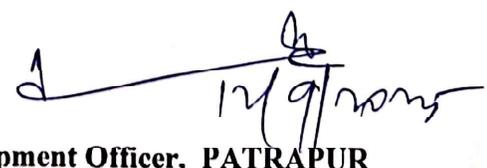
  
Block Development Officer, PATRAPUR

**For Office use only**

- |   |  |
|---|--|
| 01. E.M.D.  | Furnished / Not furnished<br>Rs. _____<br>In shape of _____<br>Pledged/Not Pledged |
| 02. Valid Registration certificate:-  | Copy furnished/ Not furnished  |
| 03. PAN Card:-  | Copy furnished/ Not furnished  |
| 04. GSTIN:-   | Copy furnished/ Not furnished  |
| 05. Nos. of Tender paper:-  | _____  |
| 06. Cost of Tender paper in case of down loading i.e. Rs. _____ /- in shape of demand draft |  |

  
Block Development Officer,  
PATRAPUR

**CONTRACTOR**

  
Block Development Officer, PATRAPUR

CONSTRUCTION OF ADDL.CLASS ROOM AT MAHADEIPUR U.P.S UNDER PATRAPUR BLOCK

Issued to Sri.....Contractor.....  
Class.....

**SCHEDULE OF QUANTITY & ABSTRACT OF COST**

Name of the Work: - CONSTRUCTION OF ADDITIONAL CLASS ROOM AT BISHNU PRIYA  
BIDYAPITHA, KELUA OF PADADIGI G.P UNDER PATRAPUR BLOCK

Estimated Cost: - Rs. 14,35,979.00

EMD: - Rs. 14,360.00

| Sl No | Description of Item  | Qty   | Unit | Rate     | Amount      |
|-------|--|-------|------|----------|-------------|
|       | Civil Work   |       |      |          |             |
| 1     | Earth Work in excavation of foundation in hard soil within initial leads of 50m & lifts of 1.5m including dressing and levelling of bed etc. and adding contractor's profit and over head charges, etc. complete in all respect.   | 47.84 | Cum  | 270.90   | 12,960.00   |
| 2     | Supplying & filling of foundation with course sand well watered and rammed including cost, cost of all labour, carriage, royalty complete in all respect.  | 51.89 | Cum  | 624.00   | 32,379.00   |
| 3     | Cement Concrete (1:3:6) using 40mm size hard granite C.B. metal approved quality from approved quarry including cost, carriage, royalty, cost of all labour, etc complete and as directed by E.I.C.  | 13.40 | Cum  | 5932.50  | 79,496.00   |
| 4     | R.C.C. M-20 grade with 20mm and down grade C.B. chips of approved quality from approved quarry including hoisting, laying hire charges of concrete mixture, vibrator, watering, curing and cost of all materials and labour, centering shuttering etc complete but excluding cost of reinforcement.          |       |      |          | -           |
|       | COLUMN UPTO PLINTH   | 12.31 | Cum  | 6201.60  | 76,342.00   |
|       | Plinth Beam, Column and Base   | 2.52  | Cum  | 7834.70  | 19,743.00   |
|       | Beam & Column  | 6.92  | Cum  | 18667.40 | 1,29,178.00 |
|       | Lintel Verandah Beam   | 1.05  | Cum  | 16049.80 | 16,852.00   |
|       | Chajja   | 11.27 | Sqm  | 1681.70  | 18,953.00   |
|       | Slab   | 10.45 | Cum  | 17538.60 | 1,83,278.00 |
| 5     | Straightening, cutting, bending bent up or coiled rods, including cranking, hooking, welding or jointing the M.S. rods or tor confirming to I.S. 432 (Plain) and 1785 (Tor) steel and binding, tying the grills, hoisting, lowering and placing in proper position required for R.C.C. works including cost, | 35.50 | Qtn  | 8668.37  | 3,07,727.00 |

CONTRACTOR

Block Development Officer, PATRAPUR

CONSTRUCTION OF DAYCARE SUBCENTRE CUM HEALTH & WELLNESS CENTRE AT ANKULI UNDER PATRAPUR BLOCK

|    |   |        |     |         |             |
|----|---|--------|-----|---------|-------------|
|    | conveyance and taxes of M.S. rods or tor steel and binding wires of 18 to 20 gauge and cost of all labour etc.complete in all respect.  |        |     |         |             |
| 6  | Brick Machinery work in Flyash Bricks of 23cm.x 11cm.x 8cm. size having crushing strength not less than 75 Kg/Cm <sup>2</sup> in cement mortar (1:6) in Sub-structure including splays, cuttings, circular moldings, watering & curing for 7 days, cost, conveyance, taxes & royalties of all materials, labour with T&P etc. complete in all respect.  |        |     |         | -           |
| a) | Sub structure   | 7.22   | Cum | 5306.80 | 38,315.00   |
| b) | Superstructure  | 30.05  | Cum | 5345.10 | 1,60,620.00 |
| 7  | Supplying of M.S. Door, Window with grills, Grills made out of M.S. Angle frame, M.S. Flat, Sheet etc of approved section & design, electrically welded properly with all necessary locking arrangement, and 1 coat red oxide primer including cost of all materials, labour charges, carriage of materials to site etc. complete.  | -      |     |         |             |
|    | M S Grills (Door & Window)  | 525.00 | Kg  | 88.70   | 46,568.00   |
| 8  | 6mm thick C.P. (1:4) finishing smooth to RCC surface after cleaning the surface.  | 100.93 | Sqm | 198.50  | 20,035.00   |
| 9  | 16mm thick C.P. (1:6) over brick masonry to the smooth surface including watering, curing cost, carriage, royalty, and taxes of all materials, cost of all labour, etc complete as per the direction of E.I.C.  | 189.40 | Sqm | 269.10  | 50,968.00   |
| 10 | 12mm thick C.P.(1:6) on brick masonry to the smooth surface including watering, curing, cost, carriage, royalty of all materials, cost of all labour, etc complete as per the direction of E.I.C.   | 189.43 | Sqm | 186.50  | 35,329.00   |
| 11 | 2.5 C.M thick grading concrete over roof  | 76.14  | Sqm | 433     | 32,969.00   |
| 12 | Supplying, fitting & fixing of 10 mm thick & size of 600x600 mm Glazed Vitrified floor tiles (GVT) of matt finish(WOODEN FINISH/RUSTIC FINISH) with veilcraft (VC) shield( Scratch free/stain free) with water absorption limit between 0.08% to 3% and conforming to IS : 15622:2006 (Group B lb) laid on 20 mm thick cement mortar (1:4) and filling joints with white cement of approved quality including cost of all materials, etc. required for the work all complete as per direction of E.I.C. |        |     |         |             |

CONTRACTOR

Block Development Officer, PATRAPUR

|    |  |        |     |         |                     |
|----|--|--------|-----|---------|---------------------|
|    | Rises  | 8.36   | Sqm | 1325.00 | 11,077.00           |
| 13 | Fixing of 10 mm thick & size of 600x600 mm Glazed Vitrified wall tiles (GVT) of matt finish(WOODEN FINISH/RUSTIC FINISH) with veilcraft (VC ) shield( Scratch free/stain free) with water absorption limit between 0.08% to 3% and conforming to IS : 15622:2006 (Group B Ib) in dados skirting and risers of steps on 12mm thick CP (1:3) jointed with neat cement slurry mixed with pigments to match the shade of the tiles including cost, carriage, cost of all labour etc. complete. |        |     |         | -                   |
|    | Ground Floor   | 76.06  | Sqm | 1078.29 | 82,015.00           |
| 14 | Priming 1 coat with wall primer water bond cement primer including all labour, materials etc. complete.  |        |     |         |                     |
|    | Ground Floor   | 474.63 | Sqm | 72.70   | 34,506.00           |
| 15 | Wall painting 2 coats with plastic emulsion paint of approved shade on new work to give an even shade including cost of paint etc complete.  |        |     |         | -                   |
|    | Ground Floor   | 285.2  | Sqm | 98.30   | 28,035.00           |
| 16 | Painting two coat with any approved paint to door & windows over a coat of primer including all  |        |     |         |                     |
|    | Ground Floor   | 19.14  | Sqm | 226.31  | 4,332.00            |
| 17 | Weather cot painting two course with approved shade over a cot of oil bound primer including cost of all materials T & P and labor etc. complete   |        |     |         |                     |
|    |  | 189.43 | Sqm | 75.50   | 14,302.00           |
|    | <b>TOTAL (In Lakhs)</b>  |        |     |         | <b>14,35,979.00</b> |

Total= Rs. 14,35,979.00

(Rupees Fourteen lakhs Thirty Five Thousand Nine Hundred Seventy Nine) only

Approved for 17 (Seventeen) items Only.

  
Block Development Officer,  
PATRAPUR

|                                    |
|------------------------------------|
| Percentage Rate Quoted in figure:- |
| Percentage Rate Quoted in Words:-  |
| Total Tendered Amount:-            |

Total No. of Corrections.....

Total No. of Over writings.....

CONTRACTOR

  
Block Development Officer, PATRAPUR

CONSTRUCTION OF DAYCARE SUBCENTRE CUM HEALTH & WELLNESS CENTRE AT ANKULI UNDER PATRAPUR BLOCK

|                                    |
|------------------------------------|
| Percentage Rate Quoted in figure:- |
| Percentage Rate Quoted in Words:-  |
| Total Tendered Amount:-            |

Total No. of Corrections.....  
Total No. of Over writings.....  
Total No. of Interpolation.....

**Signature of the Contractor**

1. In case of downloaded from official web site:

Cost of tender paper for the work "CONSTRUCTION OF ADDITIONAL CLASS ROOM OF BISHNUPRIYA BIDYAPITHA AT KELUA, OF PADADIGI G.P UNDER PATRAPUR BLOCK.

" for Rs.6,000.00 (Rupees Six Thousands) only vide Demand Draft No \_\_\_\_\_ -  
Dt. \_\_\_\_\_.

  
**Block Development Officer, PATRAPUR**

**For Office use only**

- |   |  |
|---|--|
| 01. E.M.D.  | Furnished / Not furnished<br>Rs. _____<br>In shape of _____<br>Pledged/Not Pledged |
| 02. Valid Registration certificate:-  | Copy furnished/ Not furnished  |
| 03. PAN Card:-  | Copy furnished/ Not furnished  |
| 04. GSTIN:-   | Copy furnished/ Not furnished  |
| 05. Nos. of Tender paper:-  | _____  |
| 06. Cost of Tender paper in case of down loading i.e. Rs. _____ /- in shape of demand draft |  |

  
**Block Development Officer,  
PATRAPUR**

**CONTRACTOR**

  
**Block Development Officer, PATRAPUR**

CONSTRUCTION OF DAYCARE SUBCENTRE CUM HEALTH & WELLNESS CENTRE AT ANKULI UNDER PATRAPUR BLOCK

Issued to Sri.....Contractor.....  
Class.....

**SCHEDULE OF QUANTITY & ABSTRACT OF COST**

Name of the Work: - CONSTRUCTION OF ADDITIONAL CLASS ROOM AT THANAGAON P.S  
OF TUMBAGADA G.P UNDER PATRAPUR BLOCK

Estimated Cost: - Rs. 13,18,006.00

EMD: - Rs. 13,181.00

| SI No      | Description of Item  | Qty   | Unit | Rate     | Amount      |
|------------|--|-------|------|----------|-------------|
| Civil Work |  |       |      |          |             |
| 1          | Earth Work in excavation of foundation in hard soil within initial leads of 50m & lifts of 1.5m including dressing and levelling of bed etc. and adding contractor's profit and over head charges, etc. complete in all respect.   | 47.84 | Cum  | 270.90   | 12,960.78   |
| 2          | Supplying & filling of foundation with coarse sand well watered and rammed including cost, cost of all labour, carriage, royalty complete in all respect.  | 51.89 | Cum  | 744.20   | 38,618.72   |
| 3          | Cement Concrete (1:3:6) using 40mm size hard granite C.B. metal approved quality from approved quarry including cost, carriage, royalty, cost of all labour. etc complete and as directed by E.I.C.  | 13.40 | Cum  | 6020.30  | 80,665.40   |
| 4          | R.C.C. M-20 grade with 20mm and down grade C.B. chips of approved quality from approved quarry including hoisting, laying hire charges of concrete mixture, vibrator, watering, curing and cost of all materials and labour, centering shuttering etc complete but excluding cost of reinforcement.          |       |      |          | -           |
|            | COLUMN BASES   | 12.30 | cum  | 6283.80  | 77356.72    |
|            | Plinth Beam,   | 2.52  | cum  | 7916.90  | 19,950.59   |
|            | Beam & Column  | 6.92  | cum  | 18749.70 | 1,29,747.92 |
|            | Lintel   | 1.05  | cum  | 16132.10 | 16,938.71   |
|            | Chajja   | 11.27 | Sqm  | 1687.00  | 19010.41    |
|            | Slab   | 9.74  | cum  | 17620.90 | 1,71,627.57 |
| 5          | Straightening, cutting, bending bent up or coiled rods, including cranking, hooking, welding or jointing the M.S. rods or tor confirming to I.S. 432 (Plain) and 1785 (Tor) steel and binding, tying the grills, hoisting, lowering and placing in proper position required for R.C.C. works including cost, | 34.79 | Sqm  | 8668.37  | 301576.79   |

CONTRACTOR

Block Development Officer, PATRAPUR

CONSTRUCTION OF ADDL. CLASS ROOM AT THANAGAON P.S UNDER PATRAPUR BLOCK

|    |   |        |     |         |           |
|----|---|--------|-----|---------|-----------|
|    | conveyance and taxes of M.S. rods or tor steel and binding wires of 18 to 20 gauge and cost of all labour etc.complete in all respect.  |        |     |         |           |
| 6  | Brick Machinery work in Fly-ash Bricks of 23cm.x 11cm.x 8cm. size having crushing strength not less than 75 Kg/Cm <sup>2</sup> in cement mortar (1:6) in superstructure including spalls, cuttings, circular moldings, watering & curing for 7 days, cost, conveyance, taxes & royalties of all materials, labour with T&P etc. complete in all respect.  |        |     |         | -         |
| A) | Foundation and plinth   | 7.22   | Cum | 5425.30 | 39,144.58 |
| B) | Super structure   | 18.08  | Cum | 5463.70 | 98,768.77 |
| 7  | 6 mm thick C.P.(1:4) finished smooth surface to RCC surface including watering, curing, cost, carriage, royalty of all materials, cost of all labour, etc complete as per the direction of E.I.C.   | 100.93 | Sqm | 200.40  | 20,225.50 |
| 8  | 12mm thick C.P.(1:6) on brick masonry to the smooth surface including watering, curing, cost, carriage, royalty of all materials, cost of all labour, etc complete as per the direction of E.I.C.   | 137.02 | Sqm | 190.30  | 26074.30  |
| 9  | 16mm thick C.P. (1:6) over brick masonry to the smooth surface including watering, curing cost, carriage, royalty, and taxes of all materials, cost of all labour, etc complete as per the direction of E.I.C.  | 136.99 | Sqm | 273.60  | 37,480.21 |
| 10 | Supplying, fitting & fixing of 10 mm thick & size of 600x600 mm Glazed Vitrified floor tiles (GVT) of matt finish(WOODEN FINISH/RUSTIC FINISH) with veilcraft (VC) shield( Scratch free/stain free) with water absorption limit between 0.08% to 3% and conforming to IS : 15622:2006 (Group B Ib) laid on 20 mm thick cement mortar (1:4) and filling joints with white cement of approved quality including cost of all materials, etc. required for the work all complete as per direction of E.I.C. |        |     |         |           |
|    | Ground Floor  | 76.06  | Sqm | 1083.61 | 82419.60  |
| 11 | Fixing of 10 mm thick & size of 600x600 mm Glazed Vitrified wall tiles (GVT) of matt finish(WOODEN FINISH/RUSTIC FINISH) with veilcraft (VC) shield( Scratch free/stain free) with water absorption limit between 0.08% to 3% and conforming to IS : 15622:2006 (Group B Ib) in dados skirting and risers of steps on 12mm thick CP (1:3) jointed with neat cement slurry mixed with pigments to match the shade of the tiles including cost, carriage, cost of all labour etc. complete.               |        |     |         | -         |

CONTRACTOR

Block Development Officer, PATRAPUR

CONSTRUCTION OF ADDL. CLASS ROOM AT THANAGAON P.S UNDER PATRAPUR BLOCK

|    |  |        |     |         |                     |
|----|--|--------|-----|---------|---------------------|
|    | Ground Floor   | 8.36   | Sqm | 1328.80 | 11,110.10           |
| 12 | Priming 1 coat with wall primer water bond cement primer including all labour, materials etc. complete.  |        |     |         |                     |
|    | Ground Floor   | 369.81 | Sqm | 72.70   | 26,885.19           |
| 13 | Wall painting 2 coats with plastic emulsion paint of approved shade on new work to give an even shade including cost of paint etc complete.  |        |     |         | -                   |
|    | Ground Floor   | 232.80 | Sqm | 98.30   | 22,884.24           |
| 14 | Wall painting two coat with any approved weather coat paint including cost of all materials, labor and T&P require for the work etc. complete as directed by the E.I.C.  |        |     |         |                     |
|    | Ground Floor   | 137.02 | Sqm | 75.50   | 10,344.77           |
| 15 | Supplying of M.S. Door, Window with grills, Grills made out of M.S. Angle frame, M.S. Flat, Sheet etc of approved section & design, electrically welded properly with all necessary locking arrangement, and 1 coat red oxide primer including cost of all materials, labour charges, carriage of materials to site etc. complete. | -      |     |         |                     |
|    | M S Door & Window with grill   | 413.00 | Kg  | 88.70   | 36633.10            |
| 16 | Painting 2 coats with approved paint to door & windows over one cote of primer.  | 19.14  | Sqm | 226.31  | 4331.50             |
| 17 | 2.5 CM thick grading concrete (1:2:2) over roof slab   | 74.14  | Sqm | 436.70  | 33250.34            |
|    | <b>TOTAL (In Lakhs)</b>  |        |     |         | <b>13,18,006.00</b> |

Total= Rs. 13,18,006.00

(Rupees Thirteen lakhs Eighteen Thousand Six) only  
Approved for 17 (Seventeen) items Only.

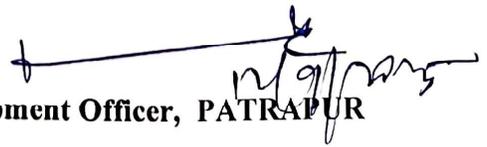
  
Block Development Officer,  
PATRAPUR

|                                    |
|------------------------------------|
| Percentage Rate Quoted in figure:- |
| Percentage Rate Quoted in Words:-  |
| Total Tended Amount:-              |

Total No. of Corrections.....  
Total No. of Over writings.....  
Total No. of Interpolation.....

Signature of the Contractor

CONTRACTOR

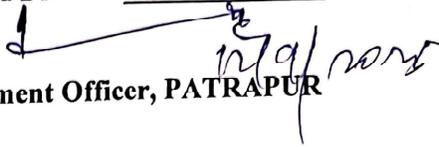
  
Block Development Officer, PATRAPUR

CONSTRUCTION OF ADDL. CLASS ROOM AT THANAGAON P.S UNDER PATRAPUR BLOCK

1. In case of downloaded from official web site:

Cost of tender paper for the work "CONSTRUCTION OF ADDITIONAL CLASS ROOM AT  
THANAGAM P.S OF TUMBAGADA G.P UNDER PATRAPUR BLOCK

" for Rs.6,000.00 (Rupees Six Thousands) only vide Demand Draft No \_\_\_\_\_  
Dt. \_\_\_\_\_.

  
Block Development Officer, PATRAPUR

**For Office use only**

01. E.M.D.

Furnished / Not furnished

Rs. \_\_\_\_\_

In shape of \_\_\_\_\_

Pledged/Not Pledged

02. Valid Registration certificate:-

Copy furnished/ Not furnished

03. PAN Card:-

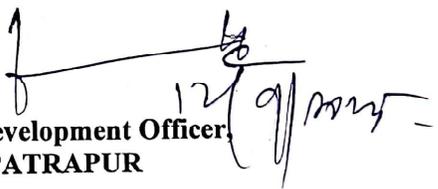
Copy furnished/ Not furnished

04. GSTIN:-

Copy furnished/ Not furnished

05. Nos. of Tender paper:- \_\_\_\_\_

06. Cost of Tender paper in case of down loading i.e. Rs. \_\_\_\_\_ /- in shape of  
demand draft

  
Block Development Officer,  
PATRAPUR

**CONTRACTOR**

  
Block Development Officer, PATRAPUR

CONSTRUCTION OF ADDL. CLASS ROOM AT THANAGAON P.S UNDER PATRAPUR BLOCK

Issued to Sri.....Contractor.....  
Class.....

### SCHEDULE OF QUANTITY & ABSTRACT OF COST

Name of the Work: - CONSTRUCTION OF ADDITIONAL CLASS ROOM AT BALIGAM P.S OF  
TUMBAGADA G.P UNDER PATRAPUR BLOCK

Estimated Cost: - Rs. 13,18,006.00

EMD: - Rs. 13,181.00

| SI No | Description of Item  | Qty   | Unit | Rate     | Amount      |
|-------|--|-------|------|----------|-------------|
|       | Civil Work   |       |      |          |             |
| 1     | Earth Work in excavation of foundation in hard soil within initial leads of 50m & lifts of 1.5m including dressing and levelling of bed etc. and adding contractor's profit and over head charges, etc. complete in all respect.   | 47.84 | Cum  | 270.90   | 12,960.78   |
| 2     | Supplying & filling of foundation with course sand well watered and rammed including cost, cost of all labour, carriage, royalty complete in all respect.  | 51.89 | Cum  | 744.20   | 38,618.72   |
| 3     | Cement Concrete (1:3:6) using 40mm size hard granite C.B. metal approved quality from approved quarry including cost, carriage, royalty, cost of all labour. etc complete and as directed by E.I.C.  | 13.40 | Cum  | 6020.30  | 80,665.40   |
| 4     | R.C.C. M-20 grade with 20mm and down grade C.B. chips of approved quality from approved quarry including hoisting, laying hire charges of concrete mixture, vibrator, watering, curing and cost of all materials and labour, centering shuttering etc complete but excluding cost of reinforcement.          |       |      |          |             |
|       | COLUMN BASES   | 12.30 | cum  | 6283.80  | 77356.72    |
|       | Plinth Beam,   | 2.52  | cum  | 7916.90  | 19,950.59   |
|       | Beam & Column  | 6.92  | cum  | 18749.70 | 1,29,747.92 |
|       | Lintel   | 1.05  | cum  | 16132.10 | 16,938.71   |
|       | Chajja   | 11.27 | Sqm  | 1687.00  | 19010.41    |
|       | Slab   | 9.74  | cum  | 17620.90 | 1,71,627.57 |
| 5     | Straightening, cutting, bending bent up or coiled rods, including cranking, hooking, welding or jointing the M.S. rods or tor confirming to I.S. 432 (Plain) and 1785 (Tor) steel and binding, tying the grills, hoisting, lowering and placing in proper position required for R.C.C. works including cost, | 34.79 | Sqm  | 8668.37  | 301576.79   |

CONTRACTOR

Block Development Officer, PATRAPUR

CONSTRUCTION OF ADDL.CLASS ROOM AT BALIGAON P.S UNDER PATRAPUR BLOCK

|    |   |        |     |         |           |
|----|---|--------|-----|---------|-----------|
|    | conveyance and taxes of M.S. rods or tor steel and binding wires of 18 to 20 gauge and cost of all labour etc.complete in all respect.  |        |     |         |           |
| 6  | Brick Machinery work in Fly-ash Bricks of 23cm.x 11cm.x 8cm. size having crushing strength not less than 75 Kg/Cm <sup>2</sup> in cement mortar (1:6) in superstructure including splays, cuttings, circular moldings, watering & curing for 7 days, cost, conveyance, taxes & royalties of all materials, labour with T&P etc. complete in all respect.  |        |     |         | -         |
| A) | Foundation and plinth   | 7.22   | Cum | 5425.30 | 39,144.58 |
| B) | Super structure   | 18.08  | Cum | 5463.70 | 98,768.77 |
| 7  | 6 mm thick C.P.(1:4) finished smooth surface to RCC surface including watering, curing, cost, carriage, royalty of all materials, cost of all labour, etc complete as per the direction of E.I.C.   | 100.93 | Sqm | 200.40  | 20,225.50 |
| 8  | 12mm thick C.P.(1:6) on brick masonry to the smooth surface including watering, curing, cost, carriage, royalty of all materials, cost of all labour, etc complete as per the direction of E.I.C.   | 137.02 | Sqm | 190.30  | 26074.30  |
| 9  | 16mm thick C.P. (1:6) over brick masonry to the smooth surface including watering, curing cost, carriage, royalty, and taxes of all materials, cost of all labour, etc complete as per the direction of E.I.C.  | 136.99 | Sqm | 273.60  | 37,480.21 |
| 10 | Supplying, fitting & fixing of 10 mm thick & size of 600x600 mm Glazed Vitrified floor tiles (GVT) of matt finish(WOODEN FINISH/RUSTIC FINISH) with veilcraft (VC) shield( Scratch free/stain free) with water absorption limit between 0.08% to 3% and conforming to IS : 15622:2006 (Group B Ib) laid on 20 mm thick cement mortar (1:4) and filling joints with white cement of approved quality including cost of all materials, etc. required for the work all complete as per direction of E.I.C. |        |     |         |           |
|    | Ground Floor  | 76.06  | Sqm | 1083.61 | 82419.60  |
| 11 | Fixing of 10 mm thick & size of 600x600 mm Glazed Vitrified wall tiles (GVT) of matt finish(WOODEN FINISH/RUSTIC FINISH) with veilcraft (VC) shield( Scratch free/stain free) with water absorption limit between 0.08% to 3% and conforming to IS : 15622:2006 (Group B Ib) in dados skirting and risers of steps on 12mm thick CP (1:3) jointed with neat cement slurry mixed with pigments to match the shade of the tiles including cost, carriage, cost of all labour etc. complete.               |        |     |         | -         |

CONTRACTOR

Block Development Officer, PATRAPUR

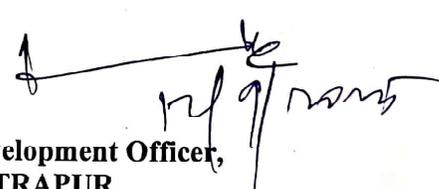
CONSTRUCTION OF ADDL.CLASS ROOM AT BALIGAON P.S UNDER PATRAPUR BLOCK

|                         |  |        |     |         |                     |
|-------------------------|--|--------|-----|---------|---------------------|
|                         | Ground Floor   | 8.36   | Sqm | 1328.80 | 11,110.10           |
| 12                      | Priming 1 coat with wall primer water bond cement primer including all labour, materials etc. complete.  |        |     |         |                     |
|                         | Ground Floor   | 369.81 | Sqm | 72.70   | 26,885.19           |
| 13                      | Wall painting 2 coats with plastic emulsion paint of approved shade on new work to give an even shade including cost of paint etc complete.  |        |     |         | -                   |
|                         | Ground Floor   | 232.80 | Sqm | 98.30   | 22,884.24           |
| 14                      | Wall painting two coat with any approved weather coat paint including cost of all materials, labor and T&P require for the work etc. complete as directed by the E.I.C.  |        |     |         |                     |
|                         | Ground Floor   | 137.02 | Sqm | 75.50   | 10,344.77           |
| 15                      | Supplying of M.S. Door, Window with grills, Grills made out of M.S. Angle frame, M.S. Flat, Sheet etc of approved section & design, electrically welded properly with all necessary locking arrangement, and 1 coat red oxide primer including cost of all materials, labour charges, carriage of materials to site etc. complete. |        |     |         |                     |
|                         | M S Door & Window with grill   | 413.00 | Kg  | 88.70   | 36633.10            |
| 16                      | Painting 2 coats with approved paint to door & windows over one cote of primer.  | 19.14  | Sqm | 226.31  | 4331.50             |
| 17                      | 2.5 CM thick grading concrete (1:2:2) over roof slab   | 74.14  | Sqm | 436.70  | 33250.34            |
| <b>TOTAL (In Lakhs)</b> |  |        |     |         | <b>13,18,006.00</b> |

Total= Rs. 13,18,006.00

(Rupees Thirteen lakhs Eighteen Thousand Six) only

Approved for 17 (Seventeen) items Only.

  
Block Development Officer,  
PATRAPUR

|                                    |
|------------------------------------|
| Percentage Rate Quoted in figure:- |
| Percentage Rate Quoted in Words:-  |
| Total Tendered Amount:-            |

Total No. of Corrections.....

Total No. of Over writings.....

Total No. of Interpolation.....

Signature of the Contractor

CONTRACTOR

  
Block Development Officer, PATRAPUR

CONSTRUCTION OF ADDL.CLASS ROOM AT BALIGAON P.S UNDER PATRAPUR BLOCK

1. In case of downloaded from official web site:

Cost of tender paper for the work "CONSTRUCTION OF ADDITIONAL CLASS ROOM AT  
BALIGAM P.S OF TUMBAGADA G.P UNDER PATRAPUR BLOCK  
" for Rs.6,000.00 (Rupees Six Thousands) only vide Demand Draft No \_\_\_\_\_  
Dt. \_\_\_\_\_.

  
Block Development Officer, PATRAPUR

**For Office use only**

01. E.M.D.

Furnished / Not furnished

Rs. \_\_\_\_\_

In shape of \_\_\_\_\_

Pledged/Not Pledged

Copy furnished/ Not furnished

Copy furnished/ Not furnished

Copy furnished/ Not furnished

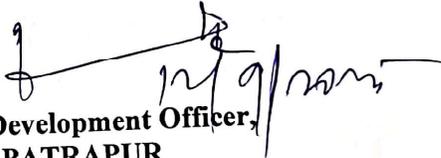
02. Valid Registration certificate:-

03. PAN Card:-

04. GSTIN:-

05. Nos. of Tender paper:-

06. Cost of Tender paper in case of down loading i.e. Rs. \_\_\_\_\_ /- in shape of  
demand draft

  
Block Development Officer,  
PATRAPUR

CONTRACTOR

  
Block Development Officer, PATRAPUR

CONSTRUCTION OF ADDL.CLASS ROOM AT BALIGAON P.S UNDER PATRAPUR BLOCK

Issued to Sri.....Contractor.....  
Class.....

**SCHEDULE OF QUANTITY & ABSTRACT OF COST**

Name of the Work: - CONSTRUCTION OF ADDITIONAL CLASS ROOM AT JARADA P.S OF JARADAGADA G.P UNDER PATRAPUR BLOCK

Estimated Cost: - Rs. 13,18,006.00

EMD: - Rs. 13,181.00

| Sl No      | Description of Item  | Qty   | Unit | Rate     | Amount      |
|------------|--|-------|------|----------|-------------|
| Civil Work |  |       |      |          |             |
| 1          | Earth Work in excavation of foundation in hard soil within initial leads of 50m & lifts of 1.5m including dressing and levelling of bed etc. and adding contractor's profit and over head charges, etc. complete in all respect.   | 47.84 | Cum  | 270.90   | 12,960.78   |
| 2          | Supplying & filling of foundation with course sand well watered and rammed including cost, cost of all labour, carriage, royalty complete in all respect.  | 51.89 | Cum  | 744.20   | 38,618.72   |
| 3          | Cement Concrete (1:3:6) using 40mm size hard granite C.B. metal approved quality from approved quarry including cost, carriage, royalty, cost of all labour. etc complete and as directed by E.I.C.  | 13.40 | Cum  | 6020.30  | 80,665.40   |
| 4          | R.C.C. M-20 grade with 20mm and down grade C.B. chips of approved quality from approved quarry including hoisting, laying hire charges of concrete mixture, vibrator, watering, curing and cost of all materials and labour, centering shuttering etc complete but excluding cost of reinforcement.          |       |      |          |             |
|            | COLUMN BASES   | 12.30 | cum  | 6283.80  | 77356.72    |
|            | Plinth Beam,   | 2.52  | cum  | 7916.90  | 19,950.59   |
|            | Beam & Column  | 6.92  | cum  | 18749.70 | 1,29,747.92 |
|            | Lintel   | 1.05  | cum  | 16132.10 | 16,938.71   |
|            | Chajja   | 11.27 | Sqm  | 1687.00  | 19010.41    |
|            | Slab   | 9.74  | cum  | 17620.90 | 1,71,627.57 |
| 5          | Straightening, cutting, bending bent up or coiled rods, including cranking, hooking, welding or jointing the M.S. rods or tor confirming to I.S. 432 (Plain) and 1785 (Tor) steel and binding, tying the grills, hoisting, lowering and placing in proper position required for R.C.C. works including cost, | 34.79 | Sqm  | 8668.37  | 301576.79   |

CONTRACTOR

Block Development Officer, PATRAPUR

CONSTRUCTION OF ADDL CLASS ROOM AT JARADA P.S UNDER PATRAPUR BLOCK

|    |   |        |     |         |           |
|----|---|--------|-----|---------|-----------|
|    | conveyance and taxes of M.S. rods or tor steel and binding wires of 18 to 20 gauge and cost of all labour etc.complete in all respect.  |        |     |         |           |
| 6  | Brick Machinery work in Fly-ash Bricks of 23cm.x 11cm.x 8cm. size having crushing strength not less than 75 Kg/Cm <sup>2</sup> in cement mortar (1:6) in superstructure including splays, cuttings, circular moldings, watering & curing for 7 days, cost, conveyance, taxes & royalties of all materials, labour with T&P etc. complete in all respect.  |        |     |         | -         |
| A) | Foundation and plinth   | 7.22   | Cum | 5425.30 | 39,144.58 |
| B) | Super structure   | 18.08  | Cum | 5463.70 | 98,768.77 |
| 7  | 6 mm thick C.P.(1:4) finished smooth surface to RCC surface including watering, curing, cost, carriage, royalty of all materials, cost of all labour, etc complete as per the direction of E.I.C.   | 100.93 | Sqm | 200.40  | 20,225.50 |
| 8  | 12mm thick C.P.(1:6) on brick masonry to the smooth surface including watering, curing, cost, carriage, royalty of all materials, cost of all labour, etc complete as per the direction of E.I.C.   | 137.02 | Sqm | 190.30  | 26074.30  |
| 9  | 16mm thick C.P. (1:6) over brick masonry to the smooth surface including watering, curing cost, carriage, royalty, and taxes of all materials, cost of all labour, etc complete as per the direction of E.I.C.  | 136.99 | Sqm | 273.60  | 37,480.21 |
| 10 | Supplying, fitting & fixing of 10 mm thick & size of 600x600 mm Glazed Vitrified floor tiles (GVT) of matt finish(WOODEN FINISH/RUSTIC FINISH) with veilcraft (VC) shield( Scratch free/stain free) with water absorption limit between 0.08% to 3% and conforming to IS : 15622:2006 (Group B Ib) laid on 20 mm thick cement mortar (1:4) and filling joints with white cement of approved quality including cost of all materials, etc. required for the work all complete as per direction of E.I.C. |        |     |         |           |
|    | Ground Floor  | 76.06  | Sqm | 1083.61 | 82419.60  |
| 11 | Fixing of 10 mm thick & size of 600x600 mm Glazed Vitrified wall tiles (GVT) of matt finish(WOODEN FINISH/RUSTIC FINISH) with veilcraft (VC) shield( Scratch free/stain free) with water absorption limit between 0.08% to 3% and conforming to IS : 15622:2006 (Group B Ib) in dados skirting and risers of steps on 12mm thick CP (1:3) jointed with neat cement slurry mixed with pigments to match the shade of the tiles including cost, carriage, cost of all labour etc. complete.               |        |     |         | -         |

**CONTRACTOR**

**Block Development Officer, PATRAPUR**

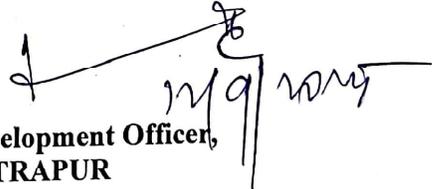
*[Signature]*  
12/9/2025

CONSTRUCTION OF ADDL.CLASS ROOM AT JARADA P.S UNDER PATRAPUR BLOCK

|    |  |        |     |         |                     |
|----|--|--------|-----|---------|---------------------|
|    | Ground Floor   | 8.36   | Sqm | 1328.80 | 11,110.10           |
| 12 | Priming 1 coat with wall primer water bond cement primer including all labour, materials etc. complete.  |        |     |         |                     |
|    | Ground Floor   | 369.81 | Sqm | 72.70   | 26,885.19           |
| 13 | Wall painting 2 coats with plastic emulsion paint of approved shade on new work to give an even shade including cost of paint etc complete.  |        |     |         | -                   |
|    | Ground Floor   | 232.80 | Sqm | 98.30   | 22,884.24           |
| 14 | Wall painting two coat with any approved weather coat paint including cost of all materials, labor and T&P require for the work etc. complete as directed by the E.I.C.  |        |     |         |                     |
|    | Ground Floor   | 137.02 | Sqm | 75.50   | 10,344.77           |
| 15 | Supplying of M.S. Door, Window with grills, Grills made out of M.S. Angle frame, M.S. Flat, Sheet etc of approved section & design, electrically welded properly with all necessary locking arrangement, and 1 coat red oxide primer including cost of all materials, labour charges, carriage of materials to site etc. complete. |        |     |         |                     |
|    | M S Door & Window with grill   | 413.00 | Kg  | 88.70   | 36633.10            |
| 16 | Painting 2 coats with approved paint to door & windows over one cote of primer.  | 19.14  | Sqm | 226.31  | 4331.50             |
| 17 | 2.5 CM thick grading concrete (1:2:2) over roof slab   | 74.14  | Sqm | 436.70  | 33250.34            |
|    | <b>TOTAL (In Lakhs)</b>  |        |     |         | <b>13,18,006.00</b> |

Total= **Rs. 13,18,006.00**

(Rupees **Thirteen lakhs Eighteen Thousand Six**) only  
Approved for **17 (Seventeen)** items Only.

  
**Block Development Officer,  
PATRAPUR**

|                                    |
|------------------------------------|
| Percentage Rate Quoted in figure:- |
| Percentage Rate Quoted in Words:-  |
| Total Tended Amount:-              |

Total No. of Corrections.....  
Total No. of Over writings.....  
Total No. of Interpolation.....

**Signature of the Contractor**

  
**Block Development Officer, PATRAPUR**

**CONTRACTOR**

1. In case of downloaded from official web site:

Cost of tender paper for the work "CONSTRUCTION OF ADDITIONAL CLASS ROOM AT  
JARADA P.S OF JARADAGADA G.P UNDER PATRAPUR BLOCK

" for Rs.6,000.00 (Rupees Six Thousands) only vide Demand Draft No \_\_\_\_\_

Dt. \_\_\_\_\_.

  
Block Development Officer, PATRAPUR

**For Office use only**

01. E.M.D.

Furnished / Not furnished

Rs. \_\_\_\_\_

In shape of \_\_\_\_\_

Pledged/Not Pledged

02. Valid Registration certificate:-

Copy furnished/ Not furnished

03. PAN Card:-

Copy furnished/ Not furnished

04. GSTIN:-

Copy furnished/ Not furnished

05. Nos. of Tender paper:-

06. Cost of Tender paper in case of down loading i.e. Rs. \_\_\_\_\_ /- in shape of  
demand draft

  
Block Development Officer,  
PATRAPUR

CONTRACTOR

  
Block Development Officer, PATRAPUR

CONSTRUCTION OF ADDL.CLASS ROOM AT JARADA P.S UNDER PATRAPUR BLOCK